

1.2/2.4 Ghz Portable Switcher & Receiver

Feature


- Equipped built-in sticker for easier tilting the CH DIP switcher
- 8-Channel Option A/V Receiver Device
- Auto/Manual DIP switcher
- Life time could last 3.5 hours Using the built-in battery
- Low-Power alert via LED Indicator
- Compact & Rugged Meg-Aluminum Alloy cas Design
- Producing clear audio affect & stable video affect



Specification

Model Number	RX-2480B	RX-1280B
Frequency Band	2400MHz	1200MHz
Available Channel	8 Ch	8 Ch
Audio Sub-Carrier	6.5 Mhz	5.5 Mhz
Phase Logic Lock	Yes	Yes
AV Output	2.1 mm Stereo Jack	
AC Charger	5 V / 800mA	
DC Battery	FUJI Li-on 3.7V / 2200mA	
Battery Charge Time	3.5 Hrs	
Battery Life Time	3.5 Hrs	3.5 Hrs
Weight (TX)	135 g	
Dimension (TX)	110x 70x 20 mm	
Antenna Connector	De-tacheable SMA connector	

Mechanical Sketch

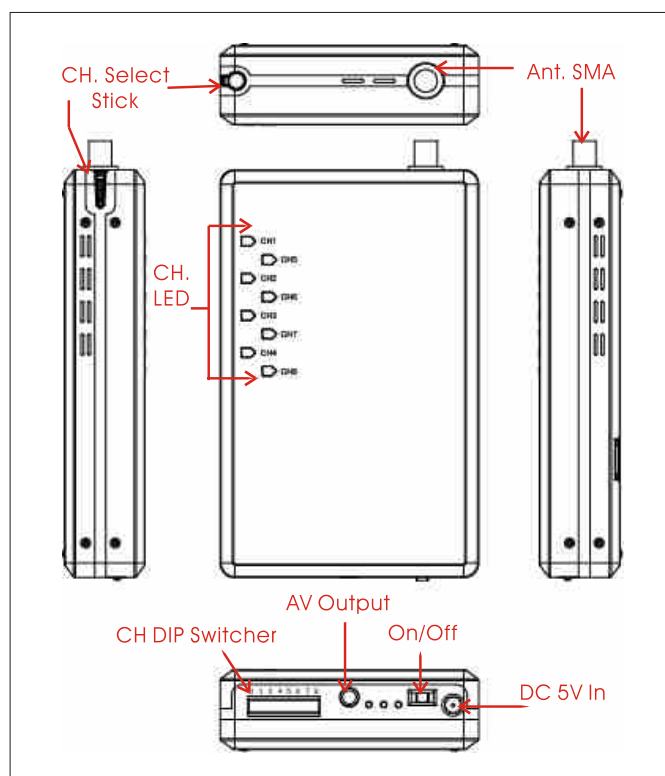

*Specification & appearance may be subjected to change without notice

Standard Shipping Accessories

- SMA Type Dipole Antenna*1
- Stereo Jack to RCA AV Output Cable*1
- Rechargeable Battery*1 & Charger*1

Order Model Number

RX-2480BCK	2.4 GHz / 8CH Receiver /w standard shipping accessories
RX-1280BCK	1.2 GHz / 8CH Receiver /w Standard shipping accessories

Each Item Shipping With Cable & Antenna