

# Product

# DATA

Data sheet no DS0502610 EN  
2010 • R1-11



## Keyboard hand-held AF serial



Article no 0502610


Orlaco Products - PO Box 193 - 3770 AD Barneveld - The Netherlands  
Phone: +31 (0) 342 404 555 - Fax: +31 (0) 342 404 556 - E-mail: [info@orlaco.nl](mailto:info@orlaco.nl) - Internet: [www.orlaco.com](http://www.orlaco.com)

## Technical Specifications

### Keyboard hand-held AF serial

<b>Article number</b>	<b>0502610</b>
<b>Application:</b>	Remote control is suitable for mobile applications. Used for adjustments of the auto focus serial camera.
<b>Communication:</b>	Visca or Orlaco protocol serial.
<b>Construction:</b>	Rubber/stainless steel housing & stainless steel bracket.
<b>Power input:</b>	11-30V/DC
<b>Power Consumption:</b>	0,36 W
<b>Protection:</b>	IP 54 acc. to DIN/IEC 529
<b>Operating temp.:</b>	-40°C to +85°C
<b>Weight:</b>	1,2Kg
<b>Spiral Cable</b>	Shielded PUR Ø 4.5 cable 4 x 0.14 (PVC) + screening, outside coil Ø 18mm, article no 1212250.
<b>Manuals</b>	User Manual and Installation Manual available.

## Keyboard




### Orlaco configuration

Pan left	Tilt up	Pan right
Zoom in	Tilt down	Zoom out
Zero Lux	Switch cam	BLC
Focus near	Focus auto	Focus far

To switch to the ORLACO configuration, press and hold the Tilt up button and the F1 button for 1 second during start up the keyboard. (BLC = Back light compensation)

## Installation/Dimensions

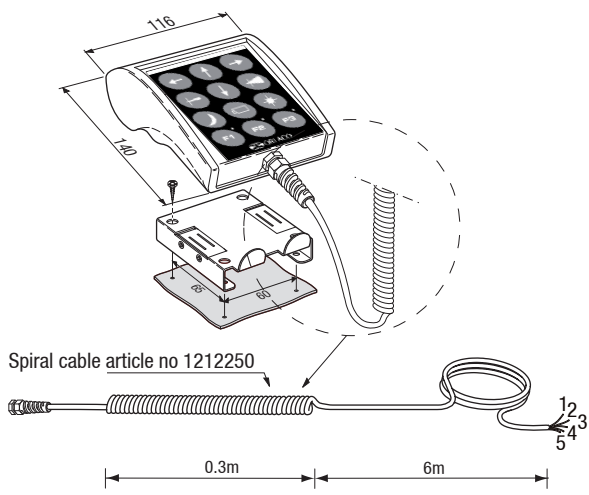

Spiral cable article no 1212250

1 = yellow	= Power input: 11 - 30V/DC +/-15%
2 = brown	= Tx
3 = green	= Rx
4 = shield	= GND
5 = white	= GND

### Configurations for different protocols

Turn off the power of the keyboard. Push two buttons at the same time for the appropriate protocol. See List. Press and hold the two buttons down while you turn on the power again.

1. LBR Quad protocol 4 camera's:  
➡ and ⬅ button during start up.
2. LBR Quad protocol 2 camera's:  
⬆ and ⬇ button during start up.
3. LBR Quad protocol 3 camera's:  
⬆ and ⬇ button during start up.
4. Orlaco protocol:  
⬆ and ⬇ button during start up.
5. NBL protocol:  
⬆ and ⬇ button during start up.
6. Smartboard protocol:  
⬆ and ⬇ button during start up.
7. LCD protocol :  
➡ and ⬅ button during start up.
8. Orlaco smartdisplay test protocol:  
➡ and ⬇ button during start up.
9. Smartboard 4 cam protocol:  
➡ and ⬇ button during start up.

Please refer to User Manual UM0502610 for more information on above listed protocols.