


Product Data

Dimensions



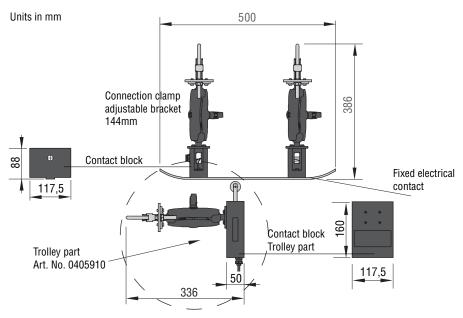

TECHNICAL DATA

Auto-Contact

Cables

Description

Set Fixed Contact + Trolley part Trolley part only 0405910 Article number 0405951

Application Establish electric contact automaticly between the trolley and the mast on tower cranes. The position can be set quickly from

many angles like for examples: vertical and sloping surfaces or overhead.

Material Delrin, black Weight 10,2 kg **Operating temperature** -40°C to +85°C

Protection Mounted on brackets designed to protect electronic parts from damage due to vibration.

Multi cable Art. no. 1210201:

Cable Trolley part, length 1,5m, 7p female connector. Cable fixed contact, lenght 1,5m, 7p male connector.

Cable Adapter fixed Contact, lenght 20m, 7p male and 7p female connectors.

Connectors: 7p female Art no 1330600, 7p male Art no 1330500

1 = Red= Power +24V/DC

2 = White = GND

Electrical connection


3 = Blue = Not connected 4 = Brown = Not connected 5 = White/Yellow = Not connected 6 = Grey= Not connected 7 = Yellow = Not connected



female

solder side





Position A **Fixed Contact**; mounted to the mast Multi cable Multi cable Connector Connector 1,5m 7p female

Trolley part; mounted to a trolley

For more installation instructions see Installation Manual IM0973090

7p male

All data subject to change without notice. All dimensions are for commercial purpose only. The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable. All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.



