

Pan Tilt unit, rugged, Stainless steel 316L
RS485 Pelco-D, marine/mining grade



Key Features:

- Highly corrosion-resistant, AISI316L stainless steel
- IP66/67 waterproof rating
- Load capacity up to 50 kg
- High quality and durability

Discover the New 250PTE Series Turrets – Semi-Heavy Load 50Kg

This version, delivered without a housing, allows you to mount any device, whether it's a camera, laser, measuring instrument, radar, etc.

Suitable for all types of installations, including vehicles, ships, offshore platforms (non-ATEX), on land, or at sea.

Direct RS485 Pelco-D control enables easy operation of the turret via a simple video surveillance joystick console, with progressive rotation speed.

The 100% stainless steel AISI 316L construction allows installation in corrosive industrial environments as well as marine settings.

Caractéristiques Techniques :

250PTE : Tourelle PAN TILT en inox 316L environnements difficiles	
Material	Inox AISI 316L
Finish	Electropolished
Certifications	Ingress Protection (EN 60529) IP66/IP67 EMC EN 50130-4; EN 55035; EN/IEC 61000-6-2; EN/IEC 61000-6-4 LVD EN60950-1; EN60950-22 RoHS 2011/65/EU + 2015/863/EU (RoHS 3) WEEE 2012/19/EU
Rotation	Horizontal : 360° endless Speed H : 0~10°/s Torque H : 80Nm Vertical : 180° (+/-90°) Speed V : 0~4°/s Torque V : 80Nm
Power Supply	24VAC or 230VAC
Backlash	< 0,1° Preset : 0,01°
Accessories	WALLPT : Wall mounting bracket POLEPT : Pole adapter
Working Temperature	-40 to +60°C, max peak 75°C
Weight	47Kg
Maximum power Consumption	120W

Allwan-Security configures the turret according to your requirements, with:

- Standard or ultra-low illumination camera
- Thermal cameras modules
- IR spotlights
- Control interfaces via IP (depending on camera models)



250PTE




ALLWAN SECURITY
VIDEO & SECURITY SOLUTIONS


Pan Tilt unit, rugged, Stainless steel 316L

RS485 Pelco-D, marine/mining grade

FRONT VIEW

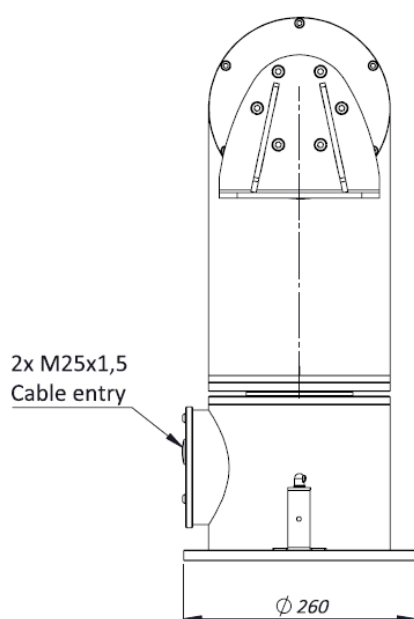

SIDE VIEW

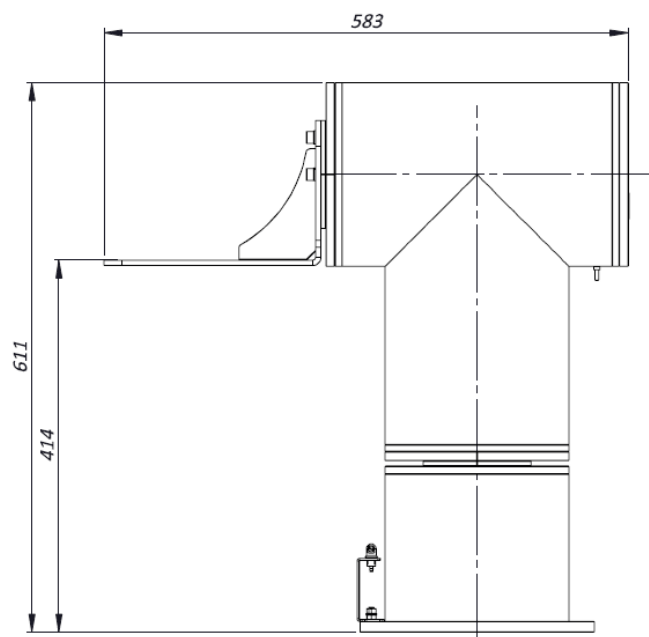

MOUNTING PATTERN

