

Rack-mounted dual or triple screen industrial display monitor



A range of rack-mountable industrial monitors equipped with multiple screens.

Perfect for applications where vision requires temporary deployment, these monitors provide a comfortable and detailed view while taking up minimal space during transport or storage. Made with high-quality components and featuring solid, long-lasting mechanics, they are an ideal companion for all surveillance and monitoring operations

Description


- Compact and foldable monitor
- Dual or triple LCD panel
- Dual or triple DVI and VGA port (options available SDI, CVBS, HDMI, DP)
- Build in 2x2 watts speakers
- Independent front OSD control buttons to optimized display




Technical specifications :

Screen size	Dual 17,3”	Triple 17,3”	Dual 24”	Triple 24”
Reference	MULTI-DUAL17	MULTI-TRI17	MULTI-DUAL24	MULTI-TRI24
Backlight Type	LED			
Resolution	1920*1080			
Contrast ratio	400 :1	400 :1	1000 :1	1000 :1
Brightness	300	300	250	250
View Angles	140/120	140/120	178/178	178/178
Pixel (mm)	0.1989x0.1989	0.1989x0.1989	0.2745x0.2745	0.2745x0.2745
Max. color	262K	262K	16.7M	16.7M
MTBF	10,000	10,000	X	X
DVI-D	Dual DVI-D 24Pin Connector (Female)	Triple DVI-D 24Pin Connector (Female)	Dual DVI-D 24Pin Connector (Female)	Triple DVI-D 24Pin Connector (Female)
VGA	Dual D-SUB 15Pin Connector (Female)	Triple D-SUB 15Pin Connector (Female)	Dual D-SUB 15Pin Connector (Female)	Triple D-SUB 15Pin Connector (Female)
OPTIONAL VIDEO INPUTS	• Composite • HDMI or Display port • 3G / HD / SD-SDI broadcast			
Audio	1 x 3.5” Jack			
Power Input	Standard IEC Inlet			
Touch USB (option)	Dual USB A type connector	Triple USB A Type connector	Dual USB A type connector	Triple USB A Type connector
Touch RS232 (option)	Dual D-SUB 9P connector (Female)	Triple D-SUB 9P connector (Female)	Dual D-SUB 9P connector (Female)	Triple D-SUB 9P connector (Female)
Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC Input 9-36VDC optional			
Height	2U Foldable	2U Foldable	2U Foldable	2.5U Foldable
Rack depth	550 to 950mm (cabinet front rail to rear rail)	550 to 950mm (cabinet front rail to rear rail)	24” to 40” (cabinet front rail to rear rail)	30” to 40” (cabinet front rail to rear rail)
Mounting	Rack Mount with tilt adjustment		X	X
Construction	Metal Housing			
Operating Temperature	0 – 50°C			
Operating Humidity	5% - 95% (non condensing)		10% - 90% (non condensing)	
Anti-Vibration	5 - 500 Hz / 1 Grms PTP			
Anti-Shock	15G / Peak (11 ms)			
Physical Dimension (LxHxP)	443 x 67 x 580 (mm)	443 x 88 x 580 (mm)	443 x 88 x 762 (mm)	443 x 113 x 762 (mm)
Net Weight / Gross Weight	18.5 / 23 (KGs)	17.5 / 23.5 (KGs)	28 / 35 (KGs)	37 / 68 (KGs)
Certification et Approvals	CE / FCC / RoHs			


Double 17.3" MULTI-DUAL17

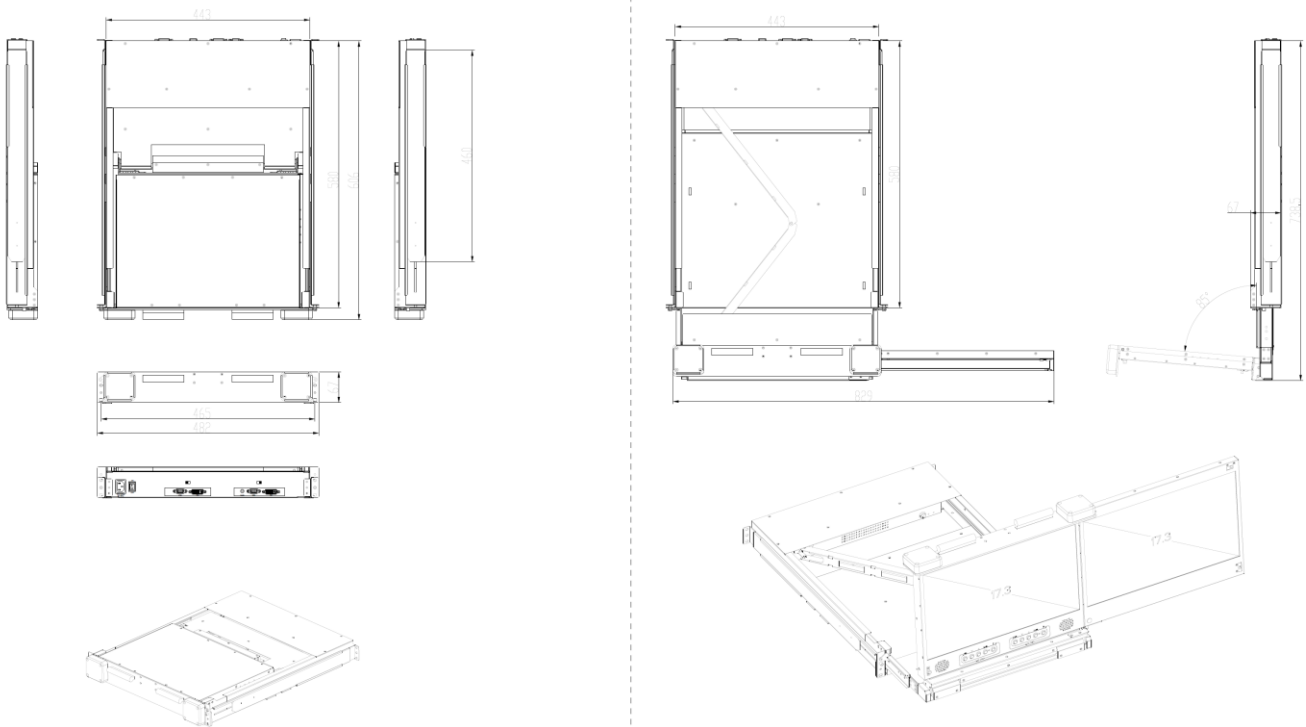

Triple 17.3" MULTI-TRI17

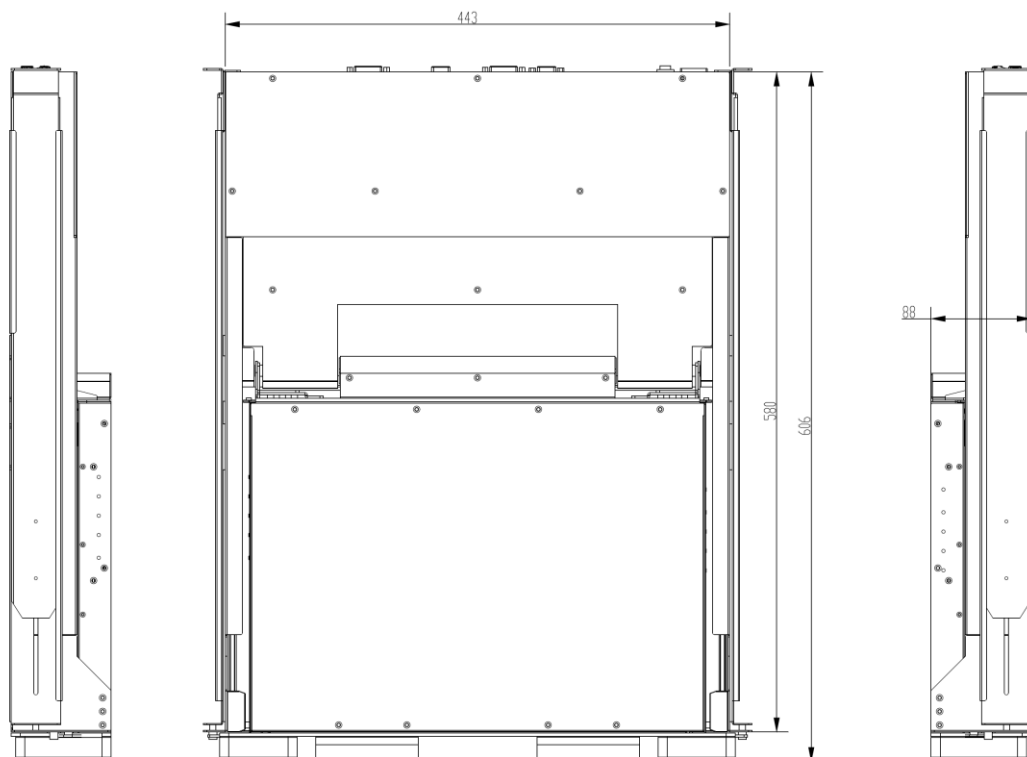

Double 24" MULTI-DUAL24

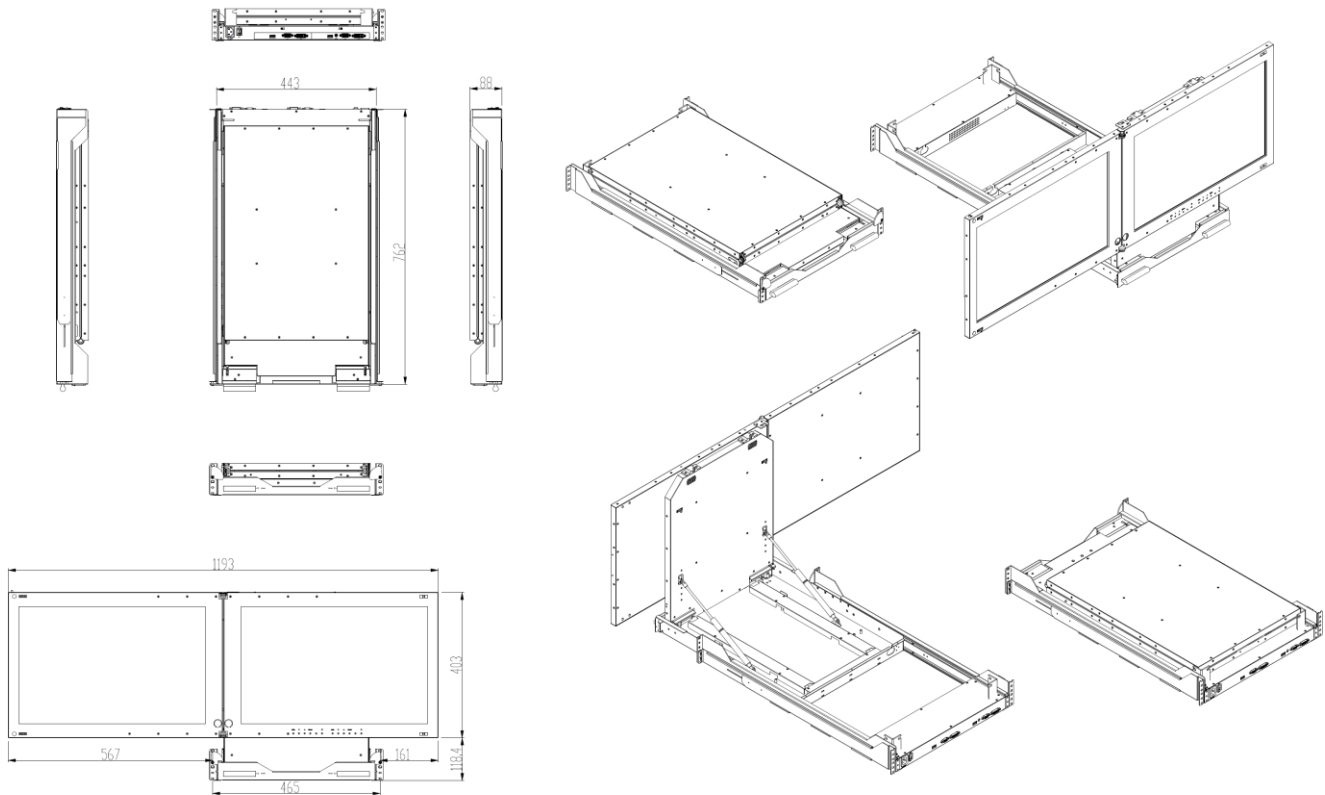

Triple 24" MULTI-TRI24

