

MO1022

HMI and display unit monitor industrial grade 21.5"

Available with VGA - DVI - HDMI – BNC



Caractéristiques Techniques :


MO1022 - 21.5" Industrial Hardened Monitor	
Screen Size	21.5 inches
Touch/Glass	Optional resistive touchscreen, protective glass (optional), SAW Touch (optional)
Resolution	1920x1080
Panel Brightness	250 nits (Optional Sunlight 1000cd/m²)
Contrast Ratio	3000:1
View Angles	89°, 89°, 89°, 89°
Colors	16.7M
Active Area	476.64 x 268.11 mm
Operating Humidity	10% to 90% RH, non-condensing
Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C
Certification	CE, FCC
USB Port	1 x USB for touch screen
Video Ports	1 x VGA, 1 x HDMI (optional), 1 x DVI (optional)
Audio	Audio line-in (3.5mm) (optional), 2 x speakers (optional)
Dimensions	506 x 302 x 60.5 mm
Mounting	VESA Mount
Enclosure	Metal
Cooling System	Fanless design
Power	12V DC, 24V DC (optional)
Buttons	5 keys: -, +, Power, E
Accessories	1 x VGA cable, 1 x HDMI cable, 100-240V AC to DC adapter, power cord, manual, VESA screws (varies by product)

Allwan Security, a specialist in field and industrial video systems for over 25 years, offers a 21.5" high-resolution monitor designed for industrial environments.

This monitor stands out for its durability, excellent image quality, and long lifespan. An optional shockproof glass provides extreme resistance under all conditions, making it ideal for demanding industrial applications.

Description

- Reinforced steel chassis
- Shock-resistant hardened panel (optional)
- BNC composite input, VGA, DVI, or HDMI
- VESA mounting footprint on the back

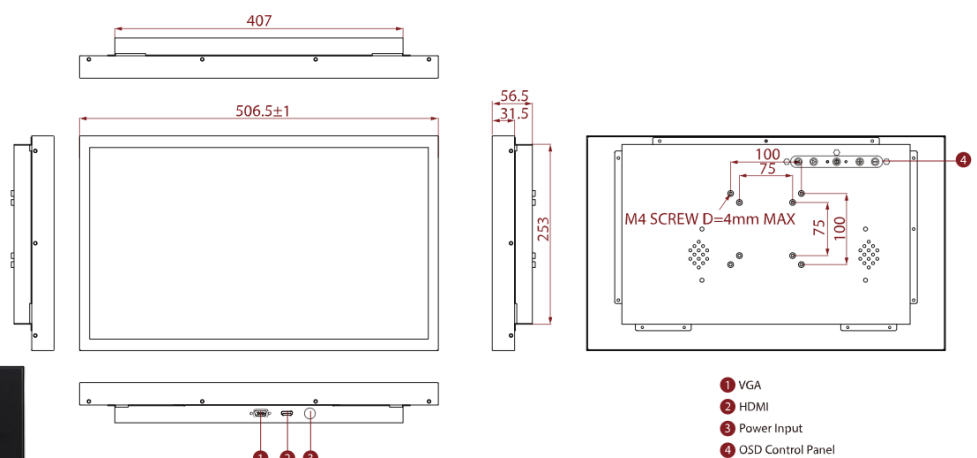

INDUSTRIE



MARINE



ATEX



INSPECTION



EMBARQUÉ