

130SA series

316L Stainless Steel Housings for Standard and Thermal Cameras (optional)

Available in small and large sizes, with optional wiper



Key Features:

- Highly corrosion-resistant, AISI 316L
- IP66/67 waterproof – NEMA 4X
- Suitable for coaxial, IP, fiber optic, thermal cameras
- Optional wiper
- Full range of mounting brackets available
- Optional washer pump and reservoir for wiper system

Discover the new 130SA series housings, available in multiple versions to suit all configurations.

The 100% AISI 316L stainless steel construction allows installation in marine environments, corrosive industrial sites, the agri-food sector, and even sewer systems.

Depending on the model, you can install an analog, HD, IP, fiber optic, or thermal camera.



Mounting accessories

Technical Specifications :





130SA series : 316L Stainless Steel Housings for Harsh Environments	
Material	AISI 316L Stainless Steel
Finish	Electro-polished
Certifications	shocks/Vibrations : EN/IEC 60068-2-6; EN/IEC 60068-2-27; DNV-CG-0339 – IK10 on all sides except the window Ingress Protection : IP66/67 EN60529 – NEMAX 4X EMC : EN 55035; EN/IEC 61000-6-4; EN/IEC 61000-3-2; EN/IEC 61000-3-3; EN/IEC 61000-6-2; CISPR-32; CISPR-35; DNV-CG-0339 LVD : EN/IEC 62368-1 RoHS : 2011/65/EU + 2015/863/EU (RoHS 3) WEEE : 2012/19/EU
Available sizes	130SA : 392mm 130SAL : 513mm 130SA(L)IR : Germanium 75mm window
Heater/Demister power supply	110VAC ; 230VAC, 24VAC, 24VDC or POE
Models	- 130SA = Standard size - 130SAL = Large model Options : - Fiber media converter SM, SC, 20Km 1310nm - IP over coaxial converter 1880m max, BPL, IEEE 1901-2010 ISP – Max 95Mbps - Wiper option (RS485 / dry-contact)
Accessories	WIPER : Wiper WIPSP : Wiper maintenance set (Blades, per 10) PUMP : Tank + pump (24;110 or 230V) WALL : Wall Mounting bracket POLE : Pole mount adapter PLAF129 : Ceiling mounting bracket
Cable inputs	2 x M20
Max power Consumption	40W
Weight	5Kg max with wiper
Working temperature	-60 to +60°C



130SA series

316L Stainless Steel Housings for Standard and Thermal Cameras (optional)

Available in small and large sizes, with optional wiper

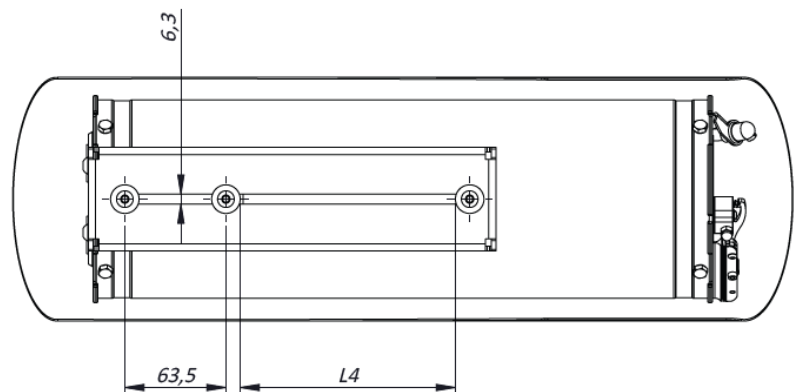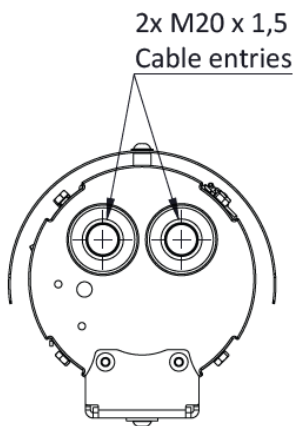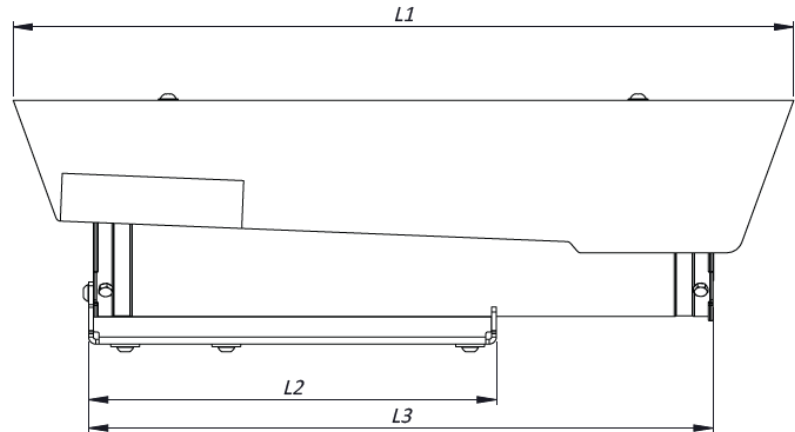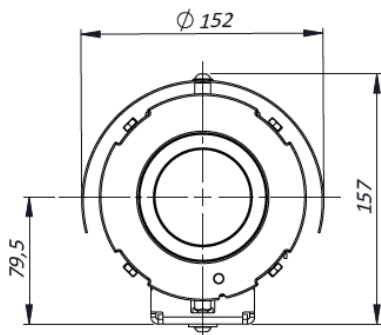

Model	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)
130SA	490	256	392	135
130SAL	590	356	513	235

Model	Usable Area (mm)	Internal usable diameter (mm)
130SA	80x80x250	96
130SA+WIPER	80x80x190	96
130SAL	80x80x350	96
130SAL+WIPER	80x80x290	96

