


# Product Data



## Dimensions

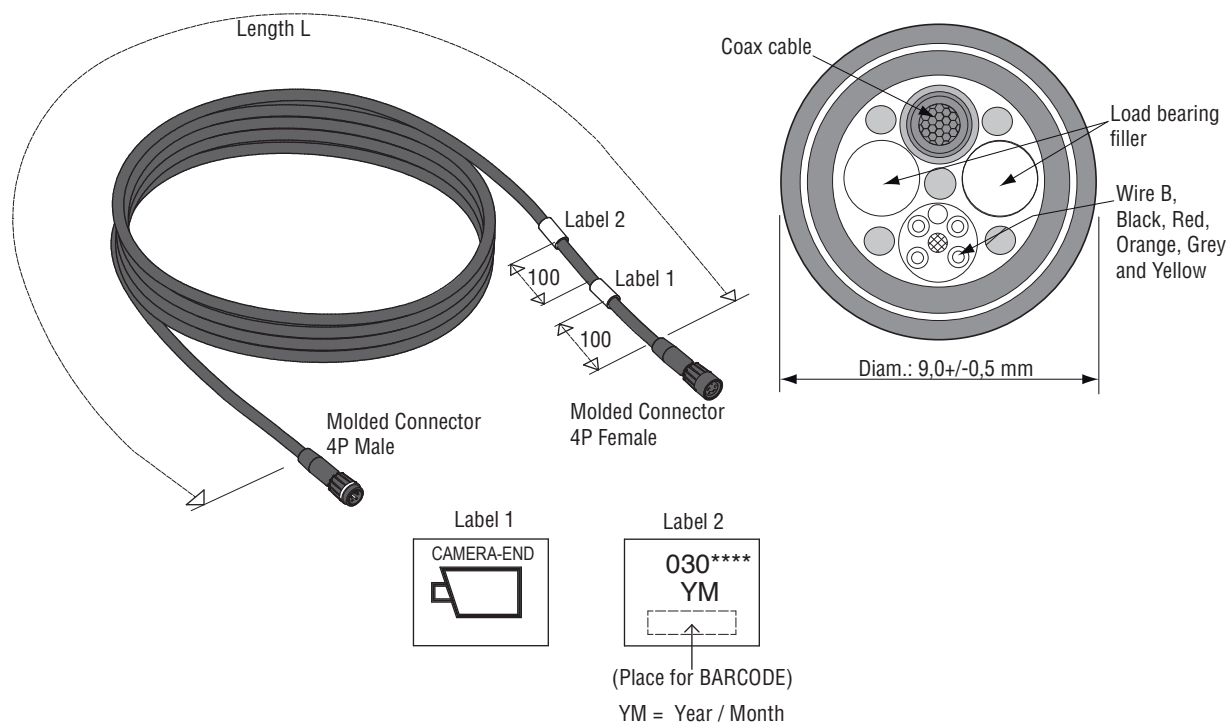


## TECHNICAL DATA

### Mast Cable 0,5m - 20m 4p Molded

	<b>Description</b>									
<b>Article number</b>	<b>0304371</b>	<b>0304281</b>	<b>0305391</b>	<b>0305341</b>	<b>0304341</b>	<b>0304381</b>	<b>0304391</b>	<b>0304431</b>	<b>0304441</b>	
<b>Cable length</b>	0,5m	1m	3,2m	3,5m	5m	6m	8m	9m	10m	
<b>Article number</b>	<b>0305250</b>	<b>0305240</b>	<b>0301811</b>	<b>0304451</b>	<b>0305260</b>	<b>0305270</b>	<b>0305351</b>	<b>0305280</b>	<b>0301731</b>	<b>0301831</b>
<b>Cable length</b>	10,4m	10,5m	11,2m	12m	12,5m	13m	13,7	14,3m	15m	20m
<b>Connectors</b>	Cable connector 4pins molded.									
<b>Cable</b>	Mast Cable, Art no 1220600, Coax; 7 x 0,10 mm SCWS, wires; 5 x AWG24 19 x 0,13mm TPC Color: Black, Red, Orange, Yellow, Grey. Jacket Black, PUR.									
<b>Protection</b>	IP67 according IEC 60529.									
<b>Approvals</b>	UV-resistant, oil resistant and Halogen free. Wires according UL Style 1589 Cable according UL Style 20963.									
<b>Fire resistance</b>	VW1 (UL 1581).									
<b>Temperature range</b>	-40°C...+85°C.									


**Note:** Application/service life Cable is designed for use on pulleys with a minimum diameter of 80mm and minimum width between flanges of 10mm. Guaranteed service life is 2 years. Consult Orlaco sales representative for other applications.



Front side  
4p Male connector

#### Electrical connection

1 = coax core	Video
2 = coax shielding	Video GND
3 = red	12...30V/DC
4 = black	0V
Orange	N.C.
Yellow	N.C.
Grey	N.C.



Front side  
4p Female connector

All data subject to change without notice. All dimensions are for commercial purpose only.  
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.  
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

