

Vision is
our mission®

Cable 1m Dynamic Digicoax
Article no. 0311440

Cable 3,5m Dynamic Digicoax
Article no. 0311400

Cable 5m Dynamic Digicoax
Article no. 0311410

Cable 10m Dynamic Digicoax
Article no. 0311420


Cable 15m Dynamic Digicoax
Article no. 0311430

2019 • DS0960129 EN A 02

Product Data



Dimensions

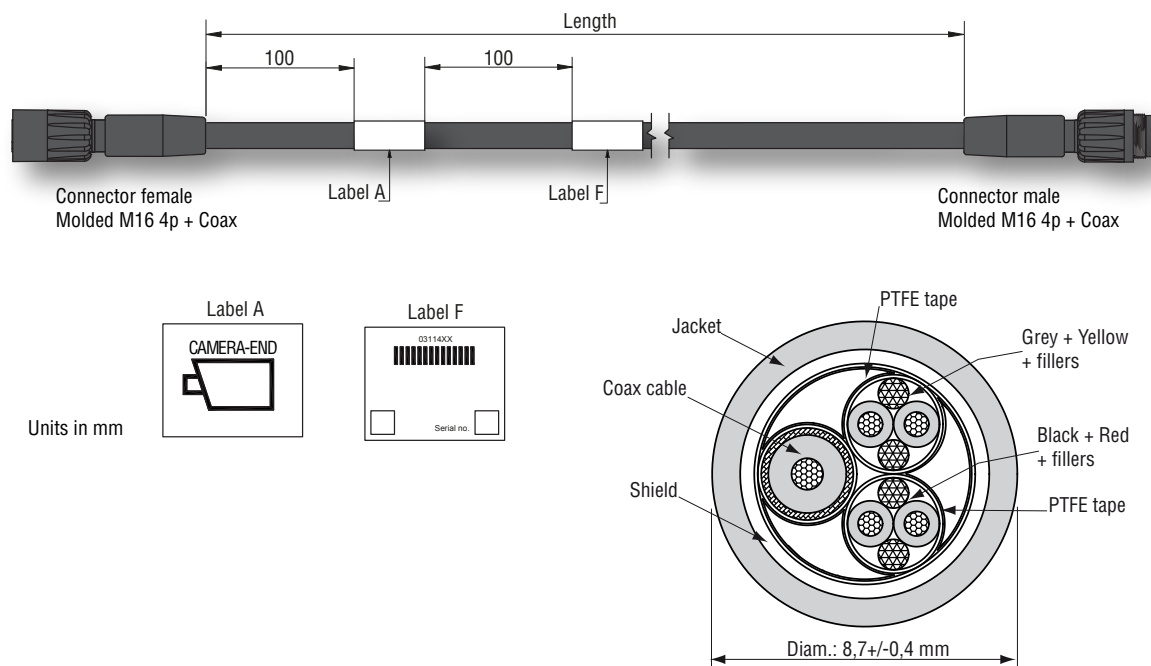


TECHNICAL DATA

Cable *m Dynamic DigiCoax


Article number	0311440	0311400	0311410	0311420	0311430
Length	1m	3,5m	5m	10m	15m
Connectors	Molded M16 4p + Coax.				
Cable	Art. no. 1220181; Cable Base 8,7B-1C50B4W Dynamic. Diameter; 8,7mm				
Temperature range	-40°...+85°C.				
Min bending radius	80mm				
Coax Nominal impedance	50Ω				
Approvals	Flame: IEC 60332-1, Oil resistant; EN60811-2-1.				

Electrical connection



Front side
female connector

1 = Black = 0V
2 = Red = Power
3 = Yellow = Aux 1
4 = Grey = Aux 2
5 = Coax core = Video
6 = Coax shield = Video GND



Front side
male connector

Overall shielding connected to connector housing.

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, IATF 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

