



Vision is
our mission®

Cable 9A-6B-1CB5W
Article no. 1220280
2018 • DS0960423 EN A 01

Product Data

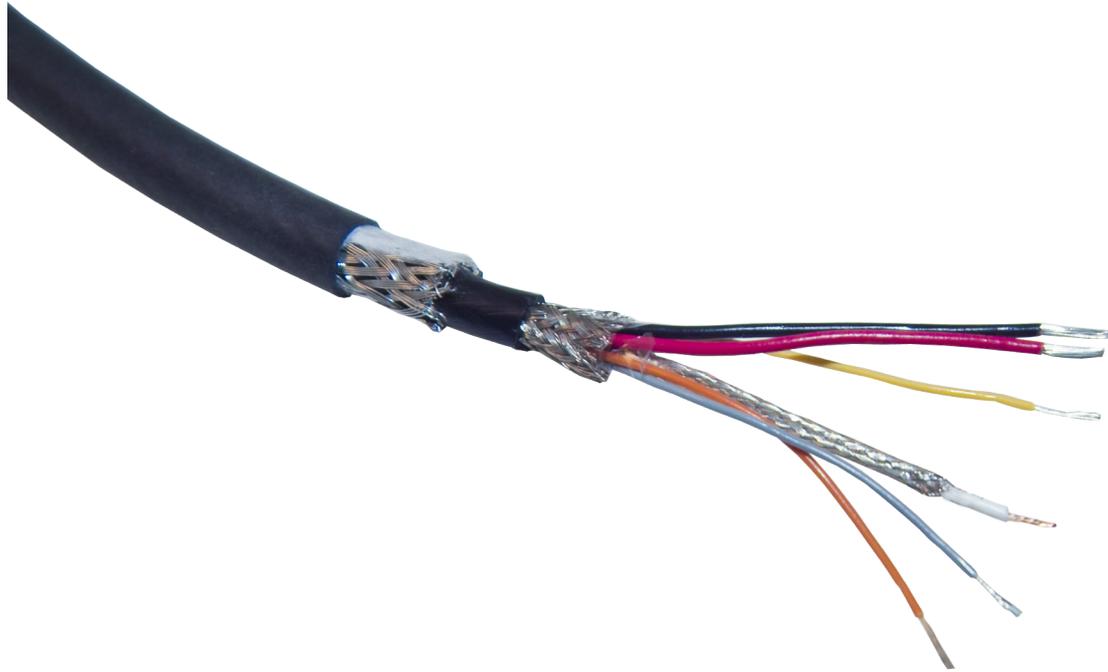

Dimensions

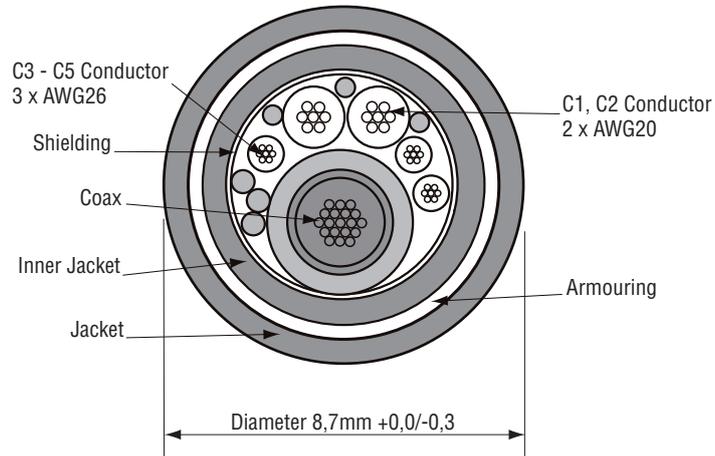

TECHNICAL DATA

Cable 9A-6B-1CB5W

	Description
Article number	1220280
Armouring	Galvanised steel, braided >75%.
Overall shielding	Tinned copper, braided >95%.
Coax	Coax Cable 1 x AWB26, 19 x 0,10 mm. Shield Braided >85%, White Foam skin PE.
C1, C2 Conductor	2 x AWG20, 19 x 0,20mm, tinned copper. Colour: Black, Red.
C3 to C5 Conductor	3 x AWG26, 19 x 0,10mm, tinned copper. Colour: Yellow, Orange, Grey.
Jacket	PUR, overall diameter 8,7mm +0,0/-0,3mm, Colour: Black RAL 9005.
Inner jacket	PVC, diameter 6mm +/-0,2mm, Colour: Black RAL 9005.
Temperature range	-40°...+85°C.
Impedance coax	75 Ω.
Approvals	Mud resistant, Oil according VDE 0472 part 803/B, Flame according to IEC 332.1. Cable jacket is halogen free, conductors are not halogen free. Cable comply with IEC 60332-3-25 cat D standards.
Min. bending radius	Static: 87mm.
Weight:	0,12 kg/m

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

