



Vision is
our mission®

Mast cable coax + 14 leads
Article no. 1221100
2018 • DS0960428 EN A 01

Product Data

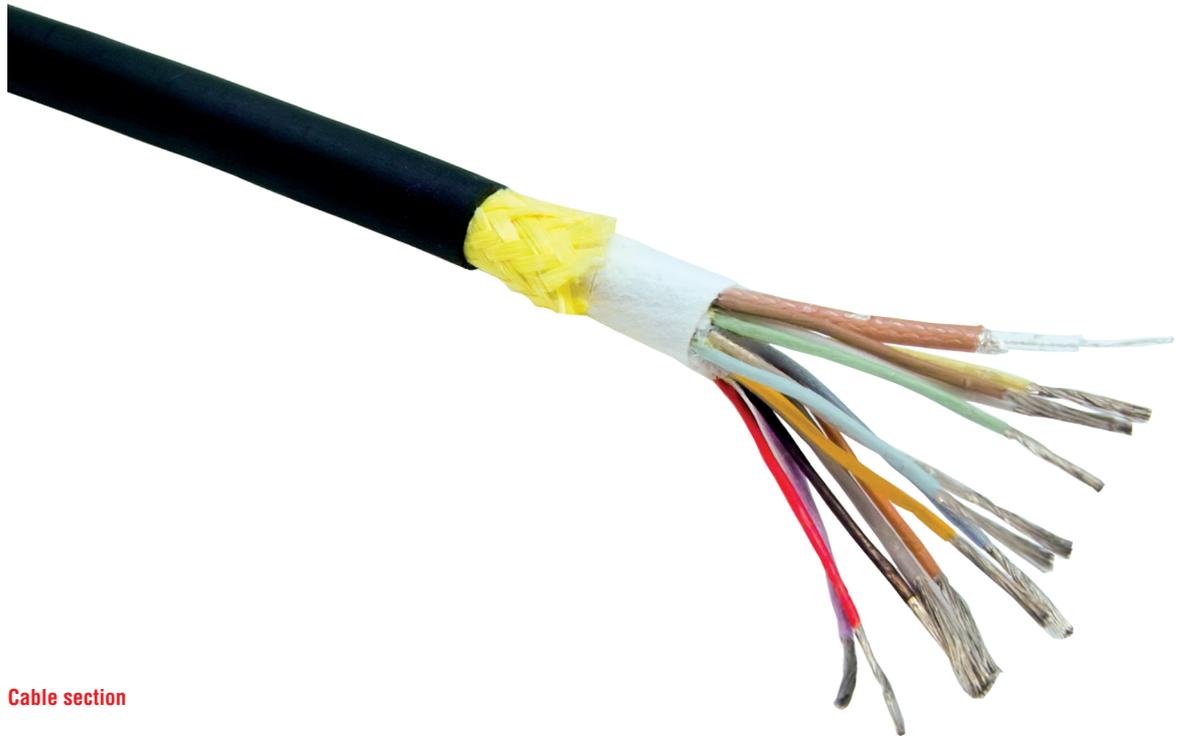

Cable section

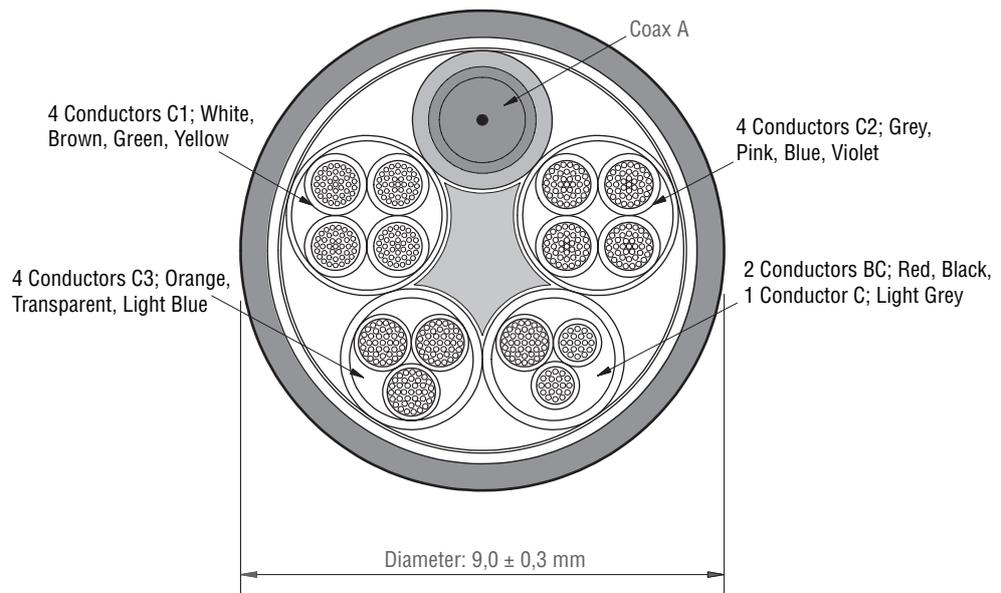

TECHNICAL DATA

Mast cable coax + 14 leads

	Description
Article number	1221100
Coax A	Coax Cable RG 179 B/U, Color: Transparant or light brown.
Conductor B	AWG22; according to VDE 0295 and UL 1581 TAB 20.1, Color: Red, Black.
Cable C	12 x AWG20; according to VDE 0295 and UL 1581 TAB 20.1, Color: Assembly cable C1; 4 conductors: White, Brown, Green, Yellow. Assembly cable C2; 4 conductors: Grey, Pink Blue, Violet. Assembly cable C3; 3 conductors: Orange, Transparent, Light Blue.
Cable BC Sheath	Assembly cable BC; 2 conductors: Red, Black (B) + 1 conductor Light Grey (C). Overall diameter 9,0 +/-0,3mm, Color: Black.
Temperature range	-40°...+85°C.
Fire resistance	VW1 (UL 1581).
Impedance (Coax)	75 Ω.

Note: Application/service life Cable is designed for use on pulleys with a minimum diameter of 80mm and minimum width between flanges of 10mm. Guarantied service life is 2 years. Consult Orlaco sales representative for other applications.

Accessories
Art No 0403330; Pulley, see also data sheet DS0403330.
Art No 0403340; Springset mast cable forklift, see also data sheet DS0403340.
Art No 0403390; Spring plates forklift, see also data sheet DS0403390.



Art No 0403330



Art No 0403340



Art No 0403390

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

