

2MP Pinhole Network Camera

Model: IPC8541P




CE FC RoHS compliant
ISO9001:2008



Features

- Support 2MP, 1920x1080
- Support H.264 / H.265
- 1/3" CMOS sensor
- Support WDR, 2D/3D DNR, BLC, HLC
- Support Mask, Defog, Mirror, Corridor mode.
- Support Motion Detection, Area intrusion, Line crossing
- Support BMP/JPEG Snapshot
- Support ONVIF
- Support Three streams
- Support WEB, VMS and Remote control (iOS/Android)


Interface

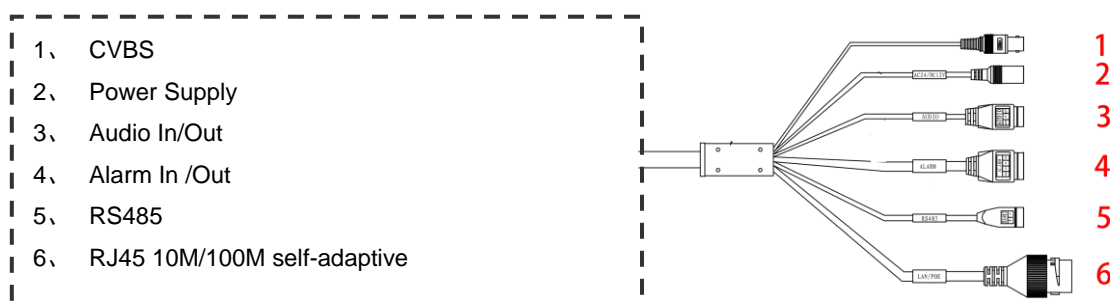

Application

Industrial design appearance, suitable for finance, supermarkets, telecommunications, government, schools, airports, factories, hotels, museums and other indoor places, especially suitable for the intersection of light and shade, such as the bank counter, supermarket front door, hotel lobby and other indoor places requiring HD monitoring.

Dimensions

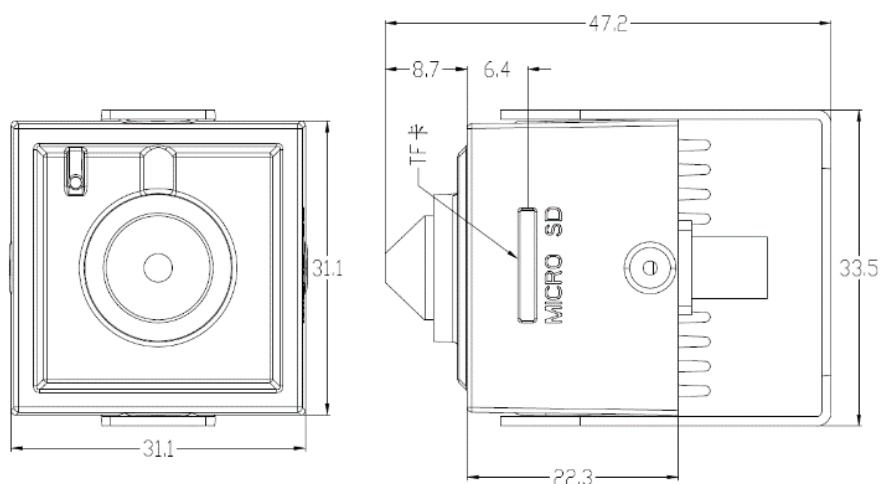

Specification

Model	APG-IPC-8541J-ZK	
Optical	Sensor	1/3" CMOS
	Lens	M12 Mount, Lens 3.7mm
	Shutter	1/25~1/100000
	Aperture	Fixed
	Illumination	0.01Lux@(F2.5,AGC ON)with color, 0.001 Lux with B/W
	D/N Shift	ICR, Auto, Timing
	DNR	2D/3D DNR
Image Setting	Pixel	1920×1080,1280×720
	Bit Rate	50Hz: PAL @ 25fps 60Hz :NTCS @30fps
	WDR	120dB
	White Balance	Auto, Manual, Sunday, Cloud day, dusk, incandescent, Sodium, Fluorescent, One-track, Auto tracking, etc.
	Image Adjustment	Saturation, Brightness, Contrast, Sharpness, Hue Adjustment
	Image Setting	Privacy Mask, Anti-Flicker, Defog, Corridor Mode, Mirror, Rotation, BLC, HLC, Distortion correction, DIS, Auxiliary focus
	Character Overlay	Channel name, date and time, multi-line character display, overlaid character size adjustment
	ROI	4 areas
Network	Intelligent Alarm	Motion Detection, Tampering, Off-line, IP conflict, HDD Full
	Protocol	TCP/IP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPoE, SMTP, UPnP
	Compatibility	ONVIF, Active Registration
	General	Three streams Heartbeat, Password
Compression	Standard	H.265 Main Profile H.264 Baseline/Main Profile/High Profile
	Output Rate	64Kbps~10Mbps
Interface	Storage	TF card local storage 128G(class10)
	Alarm Output	1ch
	Alarm Input	1ch
	Communication	RJ45*1, 10M/100M self-adaptive
	Audio Input	1ch built-in mic
	Audio Output	1ch
	Video Output	Support
	RS485	1ch
Others	Working Temp.	-20℃ - +60℃, Humidity≤95% (non-condensing)
	Power Supply	DC12V
	Power Cons.	<5W
	Dimension	33*31*47mm
	Weight	0.2Kg