


HD-SDI Camera

KPC-HD30MB


- 1/3" 2.1Mega pixel Panasonic New CMOS
- 1080p 30(25fps)
- Fixed Lens
- WDR, 3DNR, Defog, Privacy Masking
- Digital D&N
- Mini Square Camera

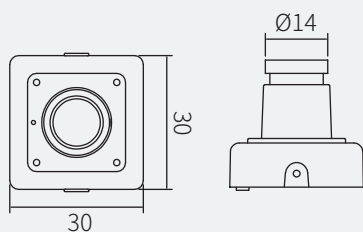

HD-SDI Camera

KPC-HD30MB

Dimensions

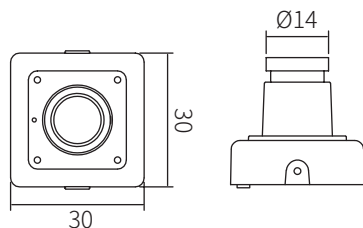

Specifications

Image Device	1/3" 2.1 Mega Pixel CMOS
Effective Pixels	1944 (H) x 1092 (V)
Unit cell size	2.75um (H) x 2.75um (V)
Video output mode	SDI : 1080P 30fps(25fps) / 720P 60fps(50fps) TV Out : CVBS NTSC/PAL
Minimum Illumination	8.0mm: 0.1 Lux (Dss Off) / 0.004 Lux (Dss Max) 3.6mm: 0.2 Lux (Dss Off) / 0.007 Lux (Dss Max)
S/N Ratio	More than 52 dB
Shutter speed	Auto / Manual selectable 1/30(25), 1/60(50), 1/120(100), 1/250, 1/500, 1/1K, 1/2K, 1/4K, 1/8K, 1/16K, 1/30K
Day/Night	Digital D&N (AUTO/Color/BW)
White Balance	AUTO / AUTO EXT / PUSH LOCK / Manual
AGC	12 ~ 60dB
WDR / BLC	Off / BLC / WDR
Lens	Board Lens / Pinhole Lens
OSD	Built-in with Joystick
Input Voltage	DC 12V [$\pm 10\%$]
Power Consumption	DC 12V Max. 120mA
ETC	Motion Detection, 3DNR, Flip (H/V/HV), DSS (x32 Max), Digital Zoom (1x ~ 20x) WDR, Defog, HLMASK, Privacy Masking
Dimension	30mm(H) x 30mm(V)
Weight	Approx. 35g
Temperature/Humidity (no condensing)	Operation : -10~50 / 20~80% Storage : -20~60 / 20~95%
Option	KPC-HD30MP4: 4.3mm Cone Pinhole Lens