

HDMI / CVBS

ATC- UZ5722U-H

4K UHD 8.95MP High Resolution
22x Global Shutter Zoom Camera



features

- 1/1" Progressive Scan Global Shutter CMOS
- 264x AF Zoom
(22x optical zoom, 12x digital zoom)
- 4K UHD (3840 x 2160 / 30fps)
- Mechanical Day&Night
- True WDR
- 3D DNR, Defog
- UART RS232-TTL (Pelco-D, Pelco C, VISCA, Hitachi)
- P-IRIS

1/1"

CMOS

30fps
UHD

2160p

22x AF


ZOOM



DNR



MOTION



Trigger In /
Strobe Out



External
sync




Global
Shutter

Specifications


Image Sensor		1/1" Progressive Scan Global Shutter CMOS
Effective Pixels		8.95MP 4112(H) x 2176(V)
Video Output Mode	Common	HDMI(1.4b) / CVBS
Max. Video Resolution		HDMI(1.4b) : 3840x2160@30fps
Synchronization system		Internal
Min. Illumination		Day mode: 0.1Lux(F1.6) Night mode: 0.06Lux(F1.6/ IR-cut filter on) Sens-Up off, AGC28dB
S/N Rate		More than 52dB(AGC off, Sens-Up off)
Lens	Type	AF Optical zoom lens(P-Iris)
	Focal Length	f=9.9mm~217mm
	F-value	F1.62(W)~5.4(T)
	Angle of View	Horizontal 71.26°(W)~3.75°(T), Vertical 41.54°(W)~1.98°(T)
Zoom ratio		Optical 22x / Digital 12x
Focus Min. Working Distance		0.5m(Wide)/10.0m(Tele)~∞
Focus Control		Auto/Manual/Interval/One Push/Presets
AE Mode		Auto/Shutter Priority/Iris Priority/Manual
Brightness		0~14
Manual Shutter		1/1, 1/2, 1/4(3), 1/8(6), 1/15(12), 1/30(25), 1/60(50)~1/10000
Manual Iris		F1.6~F32, Close
Sense-up		Off~32fields
ETC		Spot AE, Slow AE
D&N Mode		Auto/Day(Color)/Night(BW)/External-H or L
White Balance		AUTO/ATW/Indoor/Outdoor/One Push/Manual
Image Freeze		On/Off
Image Flip		Off/Horizontal/Vertical/H+V(180° Flip)
Privacy Mask Zone		16 Zones/14 mask color selectable, semi-transparency

Digital Image Stabilization		Yes
Motion Detection		4 Zones
D-WDR		Off/Low/Middle/High
WDR		Off/Low/Middle/High
BLC		Off/On, Area selectable
HLC		Off/0~20, Color selectable
AGC		Max.48dB
Sharpness		Adjustable(0~15)
3D-DNR		On/Off(1~5)
2D-DNR		Auto/Manual
Defog		Off/Low/Middle/High
Preset		256 position Presets(Zoom,Focus), 16Memory Presets, Custom Preset
Language		English
UART	Remote	RS232 TTL +5.0V(+3.3V compatible)
	Protocol	VISCA/Pelco-D/Pelco-P/ Hitachi: Automatic detection
	Baud rate	2400/4800/9600/19200/38400/57600/115200bps
Supply Voltage		12VDC
Power Consumption		Max.8.7W / Non-working zoom&focus 6.9W
Dimension(mm)		79.5x86.2x175.4mm
Weight		Approx.497g
Operating Temperature		-10°C~+50°C, Humidity(Less than 90%)
Storage Temperature		-20°C~+60°C, Humidity(Less than 90%)
Remark		


Dimension




Front

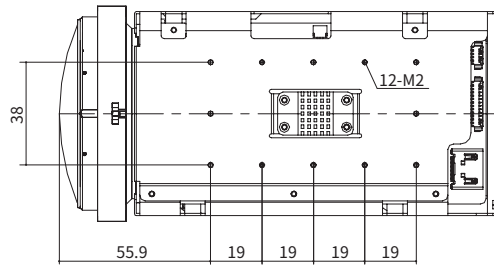


Top

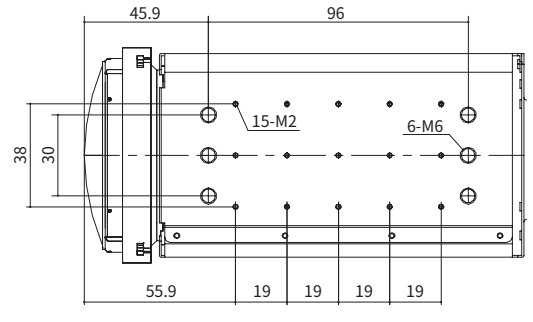


Bottom



Rear

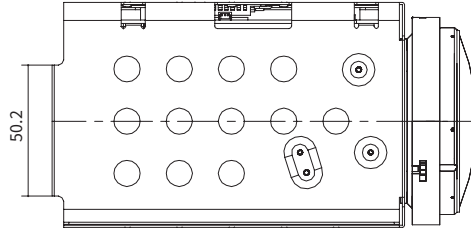


Left

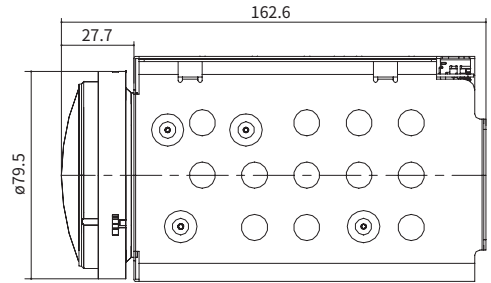

Right

Pin Assignment

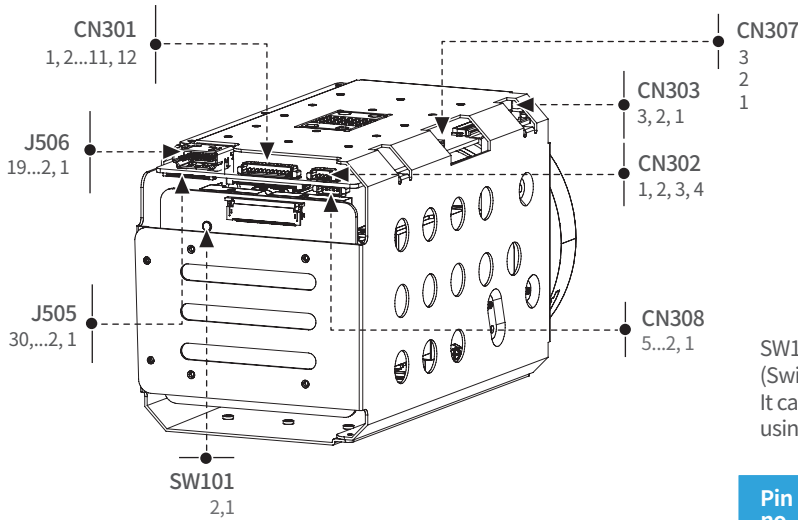

SW101 is fixed the sensor slave
(Switch 1: OFF, Switch 2: ON)
It cannot be operated when
using the other settings.

Pin no.	CN301(External I/O) / Molex : 53261-1271
1	Vsync_OUT
2	Hsync_OUT
3	VCLK_OUT
4	GND
5	Vsync_IN(1.8V)
6	Hsync_IN(1.8V)
7	VCLK_IN(1.8V)
8	GND
9	Trigger_Common
10	Trigger_IN
11	Strobe_Common
12	Strobe_OUT

Pin no.	CN302(CVBS) / Molex: 53261-0471
1	POWER IN : +12VDC
2	GND
3	VIDEO : CVBS Output
4	AD_KEY

Pin no.	CN303(External D&N) / JST: SM03B-SRSS-TB
1	Ext_D&N : External D&N Input
2	GND
3	+3.3V Out(For sensor)

Pin no.	CN307(RS-232 TTL) / JST: SM03B-SRSS-TB
1	GND
2	RXD : CMOS 3.3V Read Data
3	TXD : CMOS 3.3V Send Data

Pin no.	CN308(IR-LED I/O) / Molex : 53261-0571
1	POWER IN : +12VDC
2	GND
3	LED On/Off
4	+3.3V Out(For sensor)
5	CDS Input

Pin no.	J506(HDMI-TX) / 51U019S-30S1N-AR
1	TMDS2+
2	GND
3	TMDS2-
4	TMDS1+
5	GND
6	TMDS1-
7	TMDS0+
8	GND
9	TMDS0-
10	TMDSC+
11	GND
12	TMDSC-
13	CEC
14	NC
15	DDC_SCL
16	DDC_SDA
17	GND
18	+5VDC
19	HPD

Pin no.	J505(Micro Co-Axial) / KEL Co.USL00-30L-A (Input)
1	POWER IN: +12VDC
2	POWER IN: +12VDC
3	GND
4	GND
5	I2C_SCL(3.3V)/NC
6	I2C_SDA(3.3V)/NC
7	GND
8	Uart_TXD(5V)
9	Uart_RXD(5V)
10	GND
11	GND
12	1_HDMI(TMDS_D2+)
13	2_HDMI(GND)
14	3_HDMI(TMDS_D2-)
15	4_HDMI(TMDS_D1+)
16	5_HDMI(GND)
17	6_HDMI(TMDS_D1-)
18	7_HDMI(TMDS_D0+)
19	8_HDMI(GND)
20	9_HDMI(TMDS_D0-)
21	10_HDMI(TMDS_CLK+)
22	11_HDMI(GND)
23	12_HDMI(TMDS_CLK-)
24	13_HDMI(CEC)
25	14_HDMI(NC)
26	15_HDMI(DDC_SCL)
27	16_HDMI(DDC_SDA)
28	17_HDMI(DDC_GND)
29	18_HDMI(VCC_5V)
30	19_HDMI(HPD)