

HD-SDI / EX-SDI(V1.0/ V2.0/ V2.1/ V3.0(TBD)) / CVBS / TVI / AVI / LVDS


ATC-HZ8330T-LTA

FHD 2.3MP High Resolution
30x Global Shutter Zoom Camera



features

- 1/2.6" Progressive Scan Global Shutter CMOS
- 360x AF Zoom
(30x optical zoom, 12x digital zoom)
- 1080p 60/50/30/25fps
720p 60/50/30/25fps, 1080i 60/50fps
- Mechanical Day&Night
- True WDR
- 2D/3D DNR, Defog, DIS
- UART RS232-TTL (Pelco-D/P/C, VISCA)

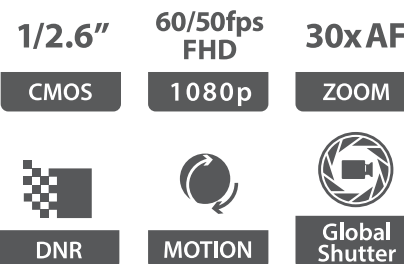

Specifications

Image Sensor		1/2.6" Progressive Scan Global Shutter CMOS
Effective Pixels		2.3MP 1920(H) x 1200(V)
Video Output Mode	Common	HD-SDI/ EX-SDI(V1.0/ V2.0/ V2.1/ V3.0(TBD))/ CVBS
	AVI/TVI/LVDS	TVI/AVI/LVDS
Max. Video Resolution		HD-SDI/LVDS/EX-SDI:1080p@60(50fps)
Synchronization system		Internal
Min.Illumination		Day mode: 0.5Lux(F1.6) Night mode: 0.2Lux(F1.6/ ICR on) Sens-Up off, AGC36dB
S/N Rate		More than 55dB(AGC off, Sens-Up off)
Lens	Type	AF Optical zoom lens(DC Iris), IR Corrective
	Focal Length	f=4.3mm~129mm
	F-value	F1.6(W)~5.0(T)
	Angle of View	Horizontal 68.9°(W)~2.5°(T), Vertical 41.0°(W)~1.5°(T)
Zoom ratio		Optical 30x / Digital 12x
Focus Min.Working Distance		0.01m(Wide)/1.0m(Tele)~∞
Focus Control		Auto/Interval/One Shot/Manual/Presets
AE Mode		Auto/Iris Priority/Shutter Priority/Manual
Brightness		1~20
Manual Shutter		1/1, 1/2, 1/4(3), 1/8(6), 1/15(12), 1/30(25), 1/60(50)~1/30000
Manual Iris		F1.6~F19, Close
Sense-up		Off~32fields
ETC		Slow AE
D&N Mode		Auto/Color(Day)/B&W(Night)/EXT-H/EXT-L
White Balance		AUTO/Indoor/Outdoor/One push/ATW/Manual
Image Freeze		Off/On
Image Flip		Off/Horizontal/Vertical/H+V(180° Flip)
Privacy Mask Zone		8 Zones/14 mask color selectable

Digital Image Stabilization		Yes
Motion Detection		4 Zones
D-WDR		Off/Low/Middle/High
WDR		Off/On, Adjustable(Level: Low/Middle/High)
BLC		Off/0~10, Area selectable
HLC		Off/0~20, Color selectable
AGC		Max.36dB
Sharpness		Adjustable(0~15)
3D-DNR		OFF/Auto(Level:0~2)/ Manual(Gain:0~255/THLD:0~255/FK:0~255)
2D-DNR		OFF/Auto(Level:0~2)/ Manual(Gain:0~255/THLD:0~255)
Defog		Off/On(Low/Middle/High)
Preset Position		192 position Presets(Zoom, Focus), 16Memory Presets, Custom Preset
Language		English, Russian, Spanish, German, French, Portuguese, Chinese, Japanese
UART	Remote	RS232 TTL +5.0V(+3.3V compatible)
	Protocol	VISCA, PELCO-D/P/C:Auto Detection
	Baud rate	2400/4800/9600/19200/38400/57600/115200bps
UTC		TVI-UTC / AVI-UTC
Supply Voltage		12VDC(9V to 15VDC)
Power Consumption		Max.5.2W / Non-working zoom&focus 3.0W
Dimension(mm)		50x58.8x90.5mm
Weight		Approx.241g
Operating Temperature		-10°C~+50°C, Humidity(Less than 90%)
Storage Temperature		-20°C~+60°C, Humidity(Less than 90%)
Remark		

Technical drawing of the front view of a square flange with a central circular opening. The drawing shows a square flange with rounded corners and a central circular hole. Four screws are visible, securing the flange. Dimension lines indicate a total width of 50, a central hole diameter of 29.4, and a total height of 58.8.

Technical drawing of the top view of a rectangular plate. The overall dimensions are 90.5 (width) and 41.7 (height). The mounting holes are arranged in a 4x2 grid. The distance between the centers of the holes in the horizontal direction is 60, and in the vertical direction is 34.4. The distance from the center of a hole to the nearest edge is 10. The drawing also shows a 4-M2 threaded hole and a 7.5 dimension for the mounting bracket.

Diagram illustrating the rear panel of the 1U rackmountable device, showing various ports and connectors:

- CN302** 1, 2, 3
- J304** 1, 2...29,30
- J305** 1, 2...8, 9
- HD-SDI (MMCX)**
- CN304** 4, 3, 2, 1
- CN301** 2, 1

Pin no.	J304(Micro Co-Axial) / KEL Co. USL00-30L-C
1	TX_OUT3+
2	TX_OUT3-
3	TX_CLKOUT+
4	TX_CLKOUT-
5	TX_OUT2+
6	TX_OUT2-
7	TX_OUT1+
8	TX_OUT1-
9	TX_OUT0+
10	TX_OUT0-
11	GND
12	TXD: CMOS 5.0V Send Data (Compatible 3.3V)
13	RXD: CMOS 5.0V Read Data (Compatible 3.3V)
14	+12VDC
15	+12VDC
16	+12VDC
17	+12VDC
18	+12VDC
19	GND
20	GND
21	TX_OUT7+ : Single out mode (open)
22	TX_OUT7- : Single out mode (open)
23	TX_OUT6+ : Single out mode (open)
24	TX_OUT6- : Single out mode (open)
25	CVBS Output
26	RESET_IN : Reset - Low (GND), Normal (1.8V)
27	TX_OUT5+ : Single out mode (open)
28	TX_OUT5- : Single out mode (open)
29	TX_OUT4+ : Single out mode (open)
30	TX_OUT4- : Single out mode (open)