

250PTV2IR series

3Mp IP PTZ camera with integrated IR spotlight

OnVif - 316L stainless steel for extreme industrial and offshore applications



Highlights:

- Highly corrosion-resistant, AISI316L stainless steel
- Waterproof IP66/67 with wiper
- Full HD IP video module
- Autofocus 33x optical zoom
- Wiper

Discover the new 250PTV2IR series ready-to-use pan-tilt cameras stations, with several versions available to suit all configurations.

This robust, IP66/67 waterproof, 316L stainless steel equipment is perfectly suitable to offshore, seaside and industrial applications in corrosive environments.

3Mp - ONVIF marine IP pan-tilt-zoom camera in 316L stainless steel	
Material	AISI 316L electropolished stainless steel
Finishing	Electro-polished (gloss)
Certifications	IP66/67 (EN60529) EMC : EN 55032; EN 55035; EN/IEC 61000-3-2; EN/IEC 61000-3-3; EN/IEC 61000-6-2; EN/IEC 61000-6-4; CISPR-32; CISPR-35 LVD : EN/IEC 62368-1 RoHS : 2011/65/EU + 2015/863/EU (RoHS 3) WEEE : 2012/19/EU
Sensor	1/2.8" Progressive CMOS, 3MP
Resolution	- Up to 2065x1553, 3MP (H.264/H.265) - Up to 1920x1080, 2MP (MJPEG)
Compression	H.265/H.264/MJPEG
Streaming	Up to 4 configurable streams
Frame rate	- 2MP: 60fps (WDR off), 30 fps (WDR on) - 3MP: 30fps (H.264/H.265)
Sensitivity	Color: 0,04 lux, N/B : 0,002 lux
Shutter speed	1 to 1/10000 s
Optical filter	Automatically removable IR-cut filter
White balance	Contrast White Balance
Dynamic range	WDR/HDR
Lens	33x Autofocus Optical Zoom, 10x Digital Zoom, 4.6-152mm, F1.6
FOV	Horizontal: 55° (Wide), 2° (Tele) Vertical: 43° (Wide), 1° (Tele)
Analytics	Motion Detection/Tampering. OPTIONAL: intrusion detection, wrong direction, object removal, sabotage, loitering, stopped vehicle, object counting
Image settings	Color, Brightness, Sharpness, Contrast, White Balance, Exposure control, 2D/3D Noise Reduction
Events Triggers	External Input, Analytics, Network Failure Detection, Periodical Event, Manual Trigger
Event actions	External Output Activation
IR lighting	850nm, 15° or 34° circular beams
Interface	- 100 Mbps Ethernet - Option 100BASE-FX or 1000BASE-X optical fiber up to 1800m, connecteur SC
Protocols	IPV4/V6, TCP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, ARP, NTP
OnVif	YES : ONVIF profile G/S/T/M compliant
Available voltages	24VAC, 120VAC, 230VAC (+/-10%) 24VDC available on request
Motorisation	PAN : 360° continuous rotation – Torque 20Nm TILT : 180° (+/-90°) - Torque 20Nm
Precision	Mechanical backlash : <0.1° Preset accuracy : 0.04°
Accessories	WALL-L Wall mounting bracket
Operating temperature	T[°C] ON = 12 ± 4°C, T[°C] OFF = 20 ± 3°C
Weight	38Kg
Max. consumption	10W min (Stationary and de-icing/heater/wiper/illuminator off), 155W MAX




ALLWAN | SECURITY
VIDEO & SECURITY SOLUTIONS

250PTV2IR series

3Mp IP PTZ camera with integrated IR spotlight

OnVif - 316L stainless steel for extreme industrial and offshore applications

Dimensions:

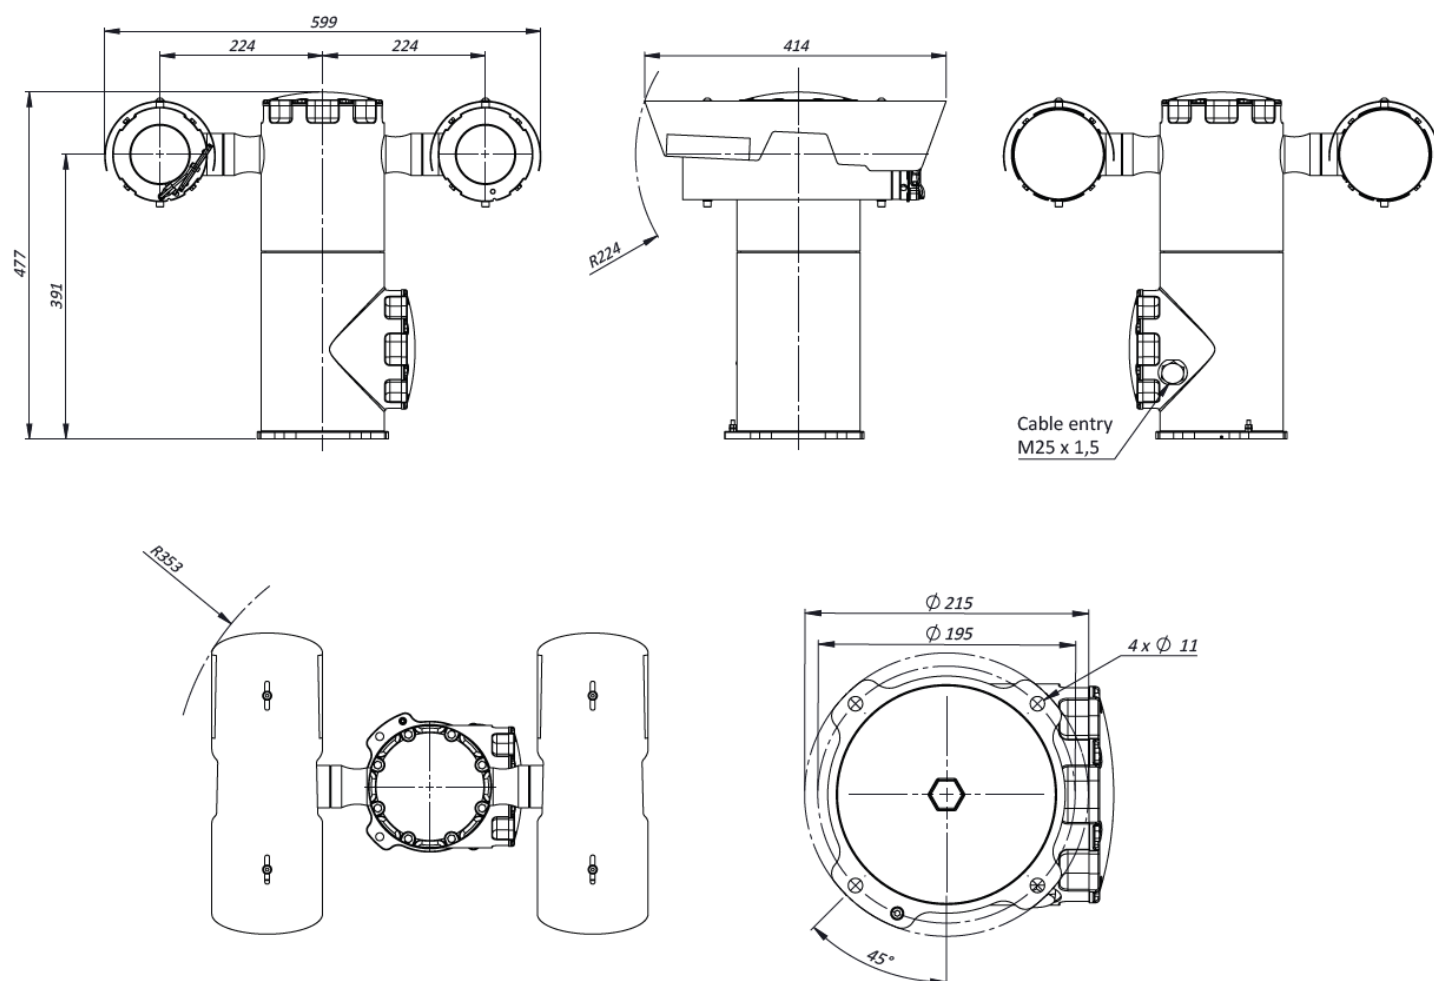

INDUSTRIE



MARINE



ATEX



INSPECTION



EMBARQUÉ