

DATA

Data sheet no DS0208203 EN
2013 • R1-1



Monitor 7" LEDD 2



Article no 0208203


Orlaco Products - PO Box 193 - 3770 AD Barneveld - The Netherlands
Phone: +31 (0) 342 404 555 - Fax: +31 (0) 342 404 556 - E-mail: info@orlaco.nl - Internet: www.orlaco.com

Technical Specifications

Monitor 7" LEDD 2

Article number	0208203
Cables / Connectors	2m multicable (power) open wired, 2m multicable (video) with 4p molded female connector Art. No.: 8975171
Weight	1,1kg (monitor, cables and connector)
Type	Automotive 7inch TFT liquid crystal display module LED backlight.
Resolution	WVGA 800xRGBx480 pixels.
Viewing	70° horizontal and 60° vertical (@ CR≥10).
LED Life Time	30000 Hrs.
Typical performance	Center luminance of white: 600cd/m2, Contrast ratio 650:1, Response time 5 ms (Tr).
Software menu	Full On-Screen-Display (OSD) functionality in 12 languages: English, Dutch, German, French, Italian, Polish, Portuguese, Spanish, Swedish, Finnish, Danish, Norwegian.
ABC mode	Improved Auto Brightness Control (ABC) including one-touch day/night setting and adjustable minimum and maximum levels for automatic control.
Operating temperature	-40°C ..+85°C.
Storage temperature	-40°C ..+125°C.
Input voltage range	Electrical 12...60V +/-10%.
Power consumption	Max 12W (only for the monitor, total power consumption depending on cameras and other peripherals)
Protection	>70V overvoltageprotection, <10V undervoltageprotection, protected against load dumps, spikes and surges, reverse polarity on all wiring.
Power-output	Nominal 2A +/-10% for powering cameras and other peripherals.
Video input	1V/t, 75Ω, Pal 50 Hz, 4,43MHz color sub carr. NTSC 60 Hz, 3,58MHz color sub carr.
Surface	Mechanical Hard coating (3H), with AG LR (Low Reflection) polarizer.
Housing	Color Black, material: aluminium & high impact automotive synthetic thermoplastic polymer.
Shock constancy	Shock and vibration resistant for usage on trucks, cranes, fork-lifts, maritime applications, machinery. Random vibration test 15,3Grms at frequency: 24 to 2000, PSD (g²/Hz) 0,04 to 0,10.
Ingress protection	LEDD: IP54 according IEC60529 (Dust protected, protected against splashing water, 10L /min for 5 min)
Truck use	Withstand all fluids and materials used in and around trucks like: ammonia solution 5%, ethanol 80-100%, isopropanol 5-10%, soapy water (min. 50% soap per volume), alkaline degreasing compounds(used in high pressure washing equipment).
Quality & environment	Certification Units are manufactured by Orlaco in the Netherlands; ISO 9001, ISO14001, ISO-TS14949.
Approvals	Approvals In compliance with all relevant EMC- and Automotive directives. Certificates available upon request. This device complies with Part 15 of the FCC Rules. Operation is subject to the following conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Green Passport	All materials are compliant to Green Passport requirements according IMO resolution MEPC.197(62) as adopted on 15 July 2011 (Maritime sector: International Maritime Organization concerning the functions of the Marine Environment Protection Committee). Each product is delivered with a User manual, Installation manual and Declaration Of Conformity (DOC).

Dimensions

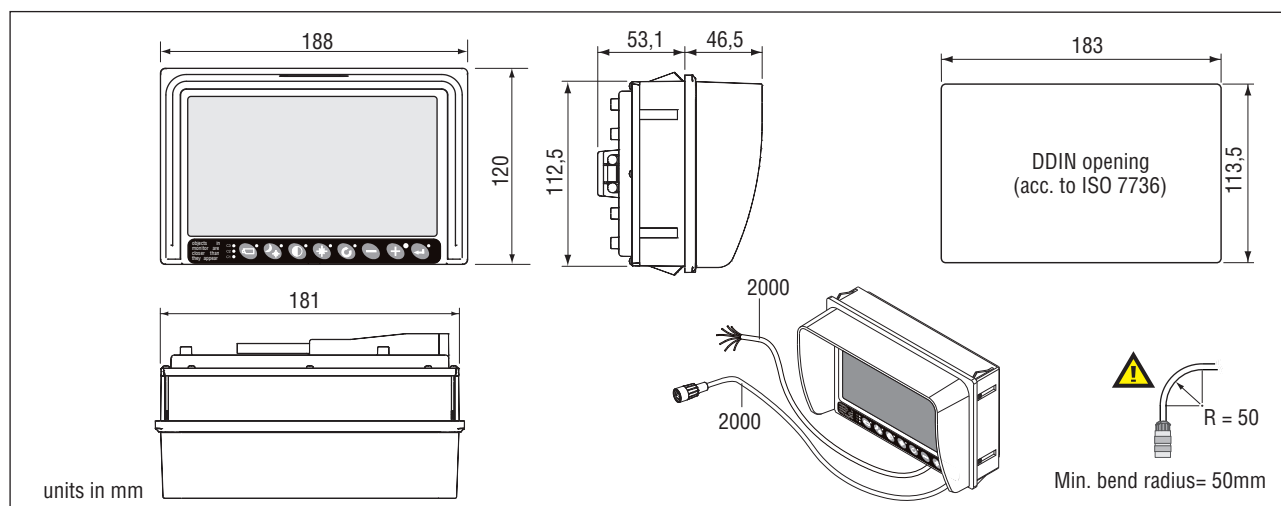

All data subject to change without notice. All dimensions are for commercial purpose only. The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations. All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives.



www.orlaco.com