

AL-PTZKIT2

Integrable PTZ control kit

RS485 – Pelco-D



DESCRIPTION

- For industrial control panels
- Waterproof buttons and joystick
- Up to 16 cameras
- RS485 Pelco-D 2400/4800/9600 Bps
- Small footprint
- 12VDC +/-10% Low consumption
- Warranty: 2 years



Equipment specially designed for industrial use, intended to be integrated into a control console.

Robust and waterproof design, it withstands wet environments or outdoors and can be used easily even with gloves.

Programmable at factory, it has 9 inputs allowing to call pre-recorded positions in the cameras (PRESET) or to control the iris.

TECHNICAL CHARACTERISTICS

AL-PTZKIT2 – In/Out

In0	Zoom+
In1	Zoom-
In2	Focus Far
In3	Focus Near
In4	Programmable*
In5	Programmable*
In6	Programmable*
In7	Programmable*
In8	Programmable*
In9	Programmable*
In10	Programmable*
In11	Programmable*
In12	Programmable*
GND (Joystick)	Mass (Joystick) – Black Thread

X	X Axis Joystick (Yellow Wire)
Y	Y Axis Joystick (Blue Wire)
5V	5V Joystick Power Supply (Red Wire)
+12V	12VDC Board Power +/-10%
GND	0V power supply Card
RS-	RS485B-
RS+	RS485A+

Mechanical and environmental data



Dimensions Card	34 x 55 mm Spacing fixation 25 x 44mm
Consumption	1W max
Temperature of use	-10 to +50°C

Communication



Protocol	Pelco-D -RS-485 2 wires
Baudrate	2400/4800/9600

Joystick :


DROP-IN MOUNT CUT-OUT AND INSTALLATION

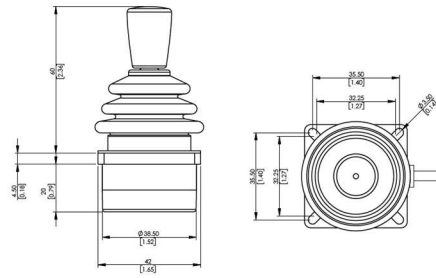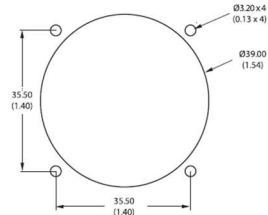

M22 buttons :

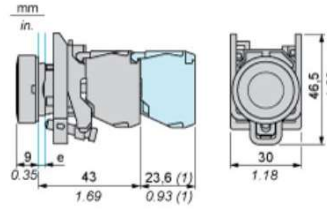

Camera Selector (optional) :

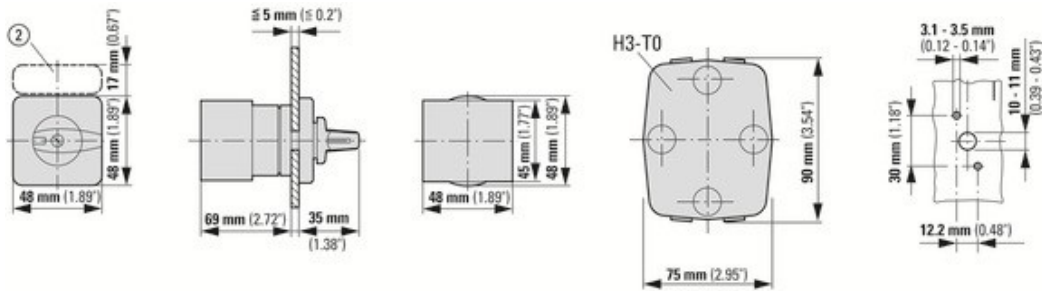

Card : (34 x 55mm)

