


ORLACO  
Vision is our mission®

Set Cable for Centre Axle Trailer Auto  
Article no. 0303990  
2018 • DS0960304 EN A 01

# Product Data



**Dimensions**  
Units in mm.

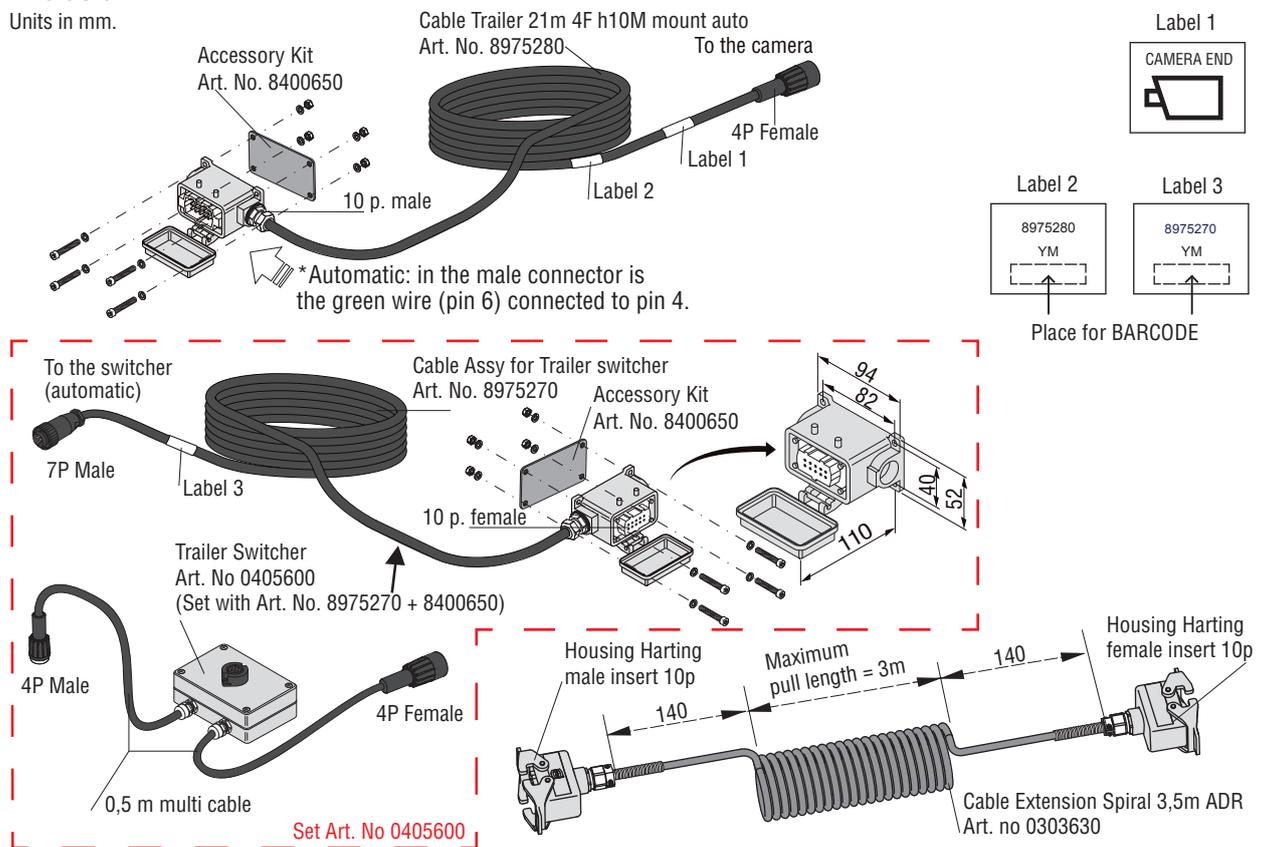


# TECHNICAL DATA

## Set Cable for Centre Axle Trailer Auto

<b>Article number</b>	<b>Description</b>
0303990	<b>0303990</b>
Operating temperature	-40°C to +85°C
Protection	IP 67 according to IEC 60529 & vibration proof.
Weight	5,35 kg
Cables	Art. No. 1220110: 1x coax, 2 x power 1x data. Art. No. 1220700: 2 x coax.


### Installation

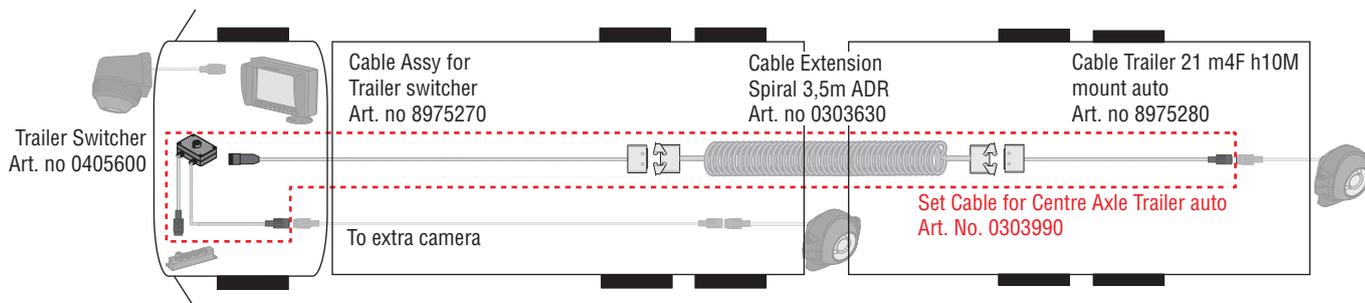

### Electrical connection


#### Soldering of connectors Trailer switcher (7p female socket & 7p male connector)

Female




- 1 = Coax core (Video signal)
- 2 = Coax screen (Video ground)
- 3 = Red
- 4 = Black
- 5 = Shielding
- 6 = N.C.
- 7 = N.C.

Male




Female



#### Front side molded connectors


- 1 = Coax core (Video signal)
- 2 = Coax screen (Video ground)
- 3 = Red (12V/DC)
- 4 = Black (0V)

Male




#### Connection 10 p. harting connector

Female



- 1 = Video signal
- 2 = Video ground
- 3 = Red
- 4 = Black\*
- 5 = N.C.
- 6 = Green\*
- 7 = N.C.
- 8 = N.C.
- 9 = N.C.
- 10 = Shielding

Male



All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

