


Vision is  
our mission®

Battery Set for power only  
Article no. 0049040  
2016 • DS0963180 EN A 01


# Product Data



## Dimensions

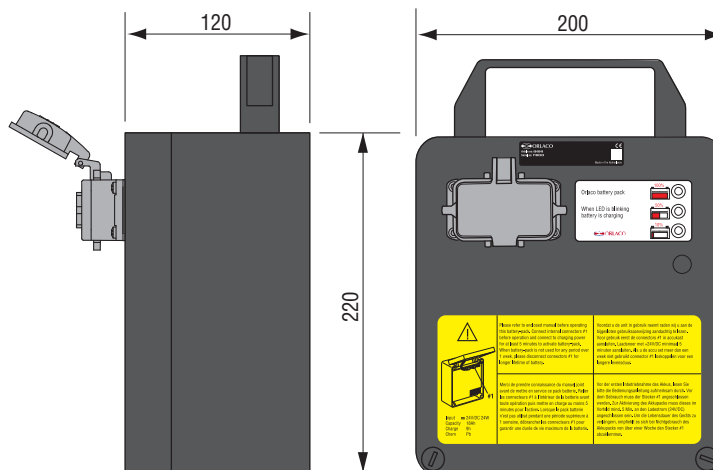


10p male Harting connector  
Art. no. 1399500 (Housing)  
Art. no. 1399600 (Insert)

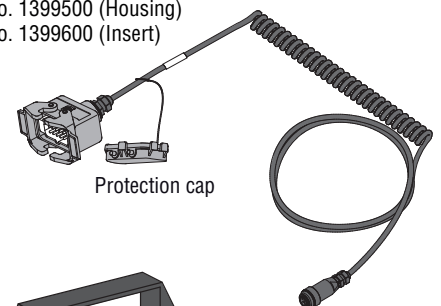

Protection cap

Connector 7p male  
Art. No. 1330500

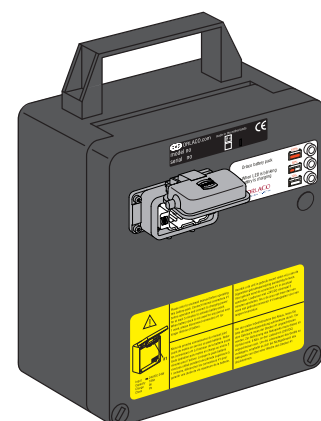

units in mm

## TECHNICAL DATA

### Battery Set for power only

	Description
Article number	0049040
Application	Suitable for a Mobile Tower Crane.
Operating temp.	-20°C to +60°C.
Charge	Built-in battery management system allows simultaneous charge and power consumption. Charge only possible between -20°C and + 60°C. Capacity drop 50% lower below -20°C. A second battery could be handy when working all the time below -20°C to charge in a cabin.
Weight	8,0 Kg (in total).
Power input	24V/DC, 2A max.
Battery capacity	18 Ah.
Output current	1,5 A max.
Protection	Input protected against reverse polarity, spikes and load dumps, deep discharge, overload & input thermal resistor.
Construction	Polyester housing, black.
Load voltage	Temperature corrected.
Power consumption	12W.
Transient protection	Powersupply is protected against inductive kickbacks, interruption of series current, negative & positive switching spikes, load dumps, overvoltage, undervoltage and polarity of wires.
Auto switch off	At 11V25 (0V5 above 10V75 = absolute minimum).
Set contents	Battery pack, charging cable 7m Art. no. 0303670.
Documentation	User Manual UM0972170 and Installation Manual IM0973480 available.

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

