


Vision is
our mission®

Mast cable 1x coax + 5x wire PUR FL


Article no. 1220600

2015 • DS1220600 EN R2-0

Product Data

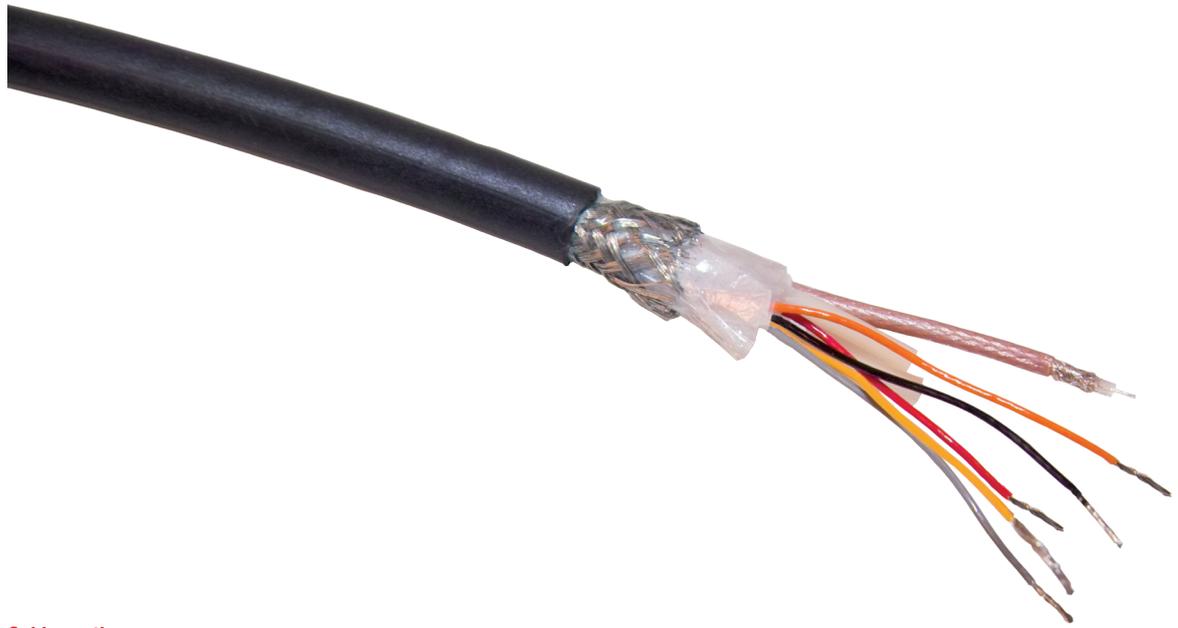

Cable section

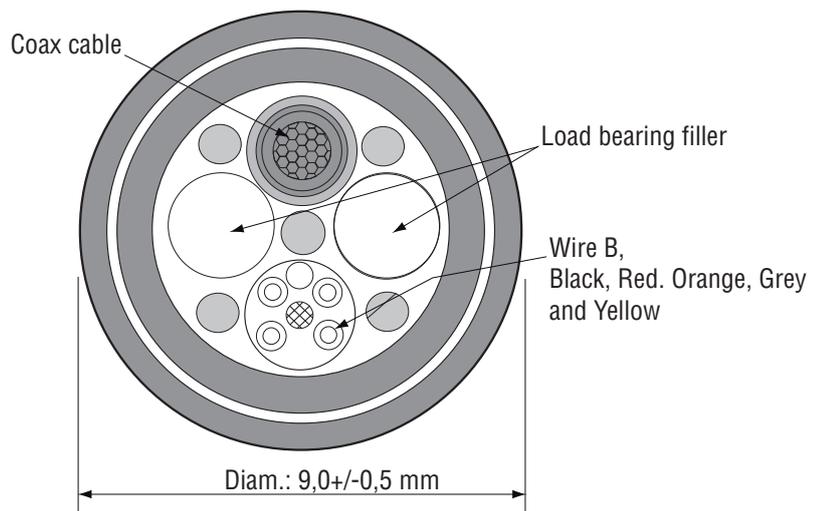

TECHNICAL DATA

Mast cable 1x coax + 5x wire PUR FL

	Description
Article number	1220600
Coax A	Coax Cable 7 x 0,10 mm SCWS Colour: Transparant white.
Wire B	5 x AWG24 19 x 0,13mm TPC Colour: Black, Red, Orange, Yellow, Grey.
Fillers	2 x Loadbearing
Sheath	Overall diameter 9,0mm +/-0,5mm (Max), Colour: Black.
Shield	Braided TPC braid, coverage > 85%.
Temperature range	-40°...+85°C.
Impedance Coax	75 Ω
Approvals	UV-resistant, oil resistant and Halogen free. Wires according UL Style 1589 Cable according UL Style 20963
Fire resistance	VW1 (UL 1581).
Accessories	Art No 0403330; Pulley, see also data sheet DS0403330. Art No 0403340; Springset mast cable forklift, see also data sheet DS0403340. Art No 0403390; Spring plates forklift, see also data sheet DS0403390.
Note:	Application/service life Cable is designed for use on pulleys with a minimum diameter of 80mm and minimum width between flanges of 10mm. Guarantied service life is 2 years. Consult Orlaco sales representative for other applications.



Art No 0403330



Art No 0403340



Art No 0403390

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

