

Vision is
our mission®


Keyboard hand-held AF serial 7p male

Article no. 0502650

2017 • DS09632920 EN A 01

Product Data

Dimensions

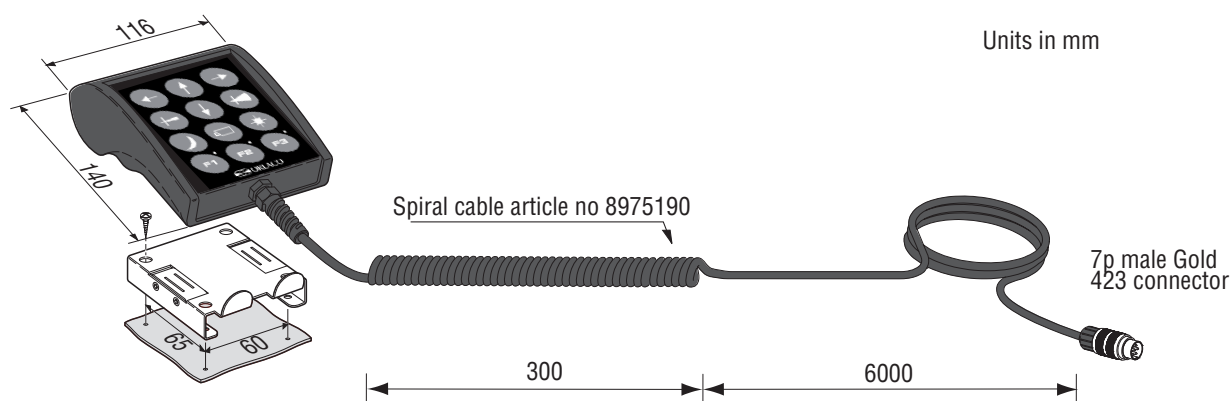

Keyboard hand-held AF serial 7p male

Article number
Application
Communication
Construction
Power input
Power Consumption
Protection
Operating temp.
Weight
Cable/connector

Description

0502650

Remote control is suitable for mobile applications. Used for adjustments of the auto focus serial camera.

Visca or Orlaco protocol serial.

Rubber/stainless steel housing & stainless steel bracket.

12-30V/DC

0,36 W

IP 54 acc. to IEC 60529


-40°C to +85°C

1,2Kg

Shielded PUR Ø 4.5 cable 4 x 0.14 (PVC) + screening, outside coil Ø 18mm, article no 8975190.

7p male Gold 423 connector.

Keyboard



Orlaco configuration

Pan left	Tilt up	Pan right
Zoom in	Tilt down	Zoom out
Zero Lux	Switch cam	BLC
Focus near	Focus auto	Focus far


To switch to the ORLACO configuration, press and hold the Tilt up button and the F1 button for 1 second during start up the keyboard. (BLC = Back light compensation)

Configurations for different protocols

Turn off the power of the keyboard. Push two buttons at the same time for the appropriate protocol. See List. Press and hold the two buttons down while you turn on the power again.

1. LBR Quad protocol 4 camera: ⬅️ and F1 button during start up.
2. LBR Quad protocol 2 camera's: ⬅️ and F2 button during start up.
3. LBR Quad protocol 3 camera's: ⬅️ and F3 button during start up.
4. Orlaco protocol: ⬆️ and F1 button during start up.
5. NBL protocol: ⬆️ and F2 button during start up.
6. Smartboard protocol: ⬆️ and F3 button during start up.
7. LCD protocol : ➡️ and F1 button during start up.
8. Orlaco smartdisplay test protocol: ➡️ and F2 button during start up.
9. Smartboard 4 cam protocol: ➡️ and F3 button during start up.

Please refer to User Manual UM0972240 and Installation Manual IM0973590 for more information on listed protocols.



Electrical connection

Keyboard Hand-Held 7p male connector

- | | |
|-----------------------|----------------|
| 1 = NC | |
| 2 = NC | |
| 3 = Yellow | = Power 24V/DC |
| 4 = White + Shielding | = GND |
| 5 = Green | = RX |
| 6 = Brown | = TX |
| 7 = Grey | = NC |

All data subject to change without notice. All dimensions are for commercial purpose only.

The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.

All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

