



# Product Data


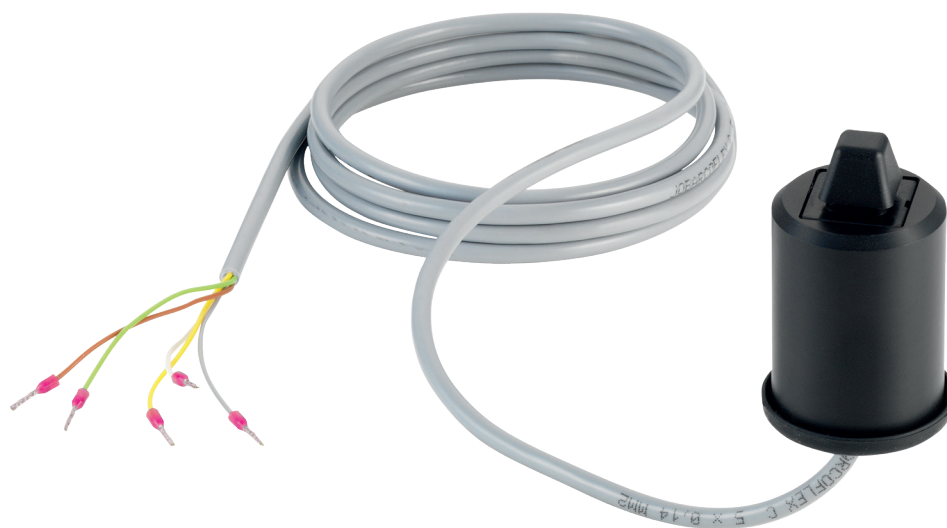


## Dimensions

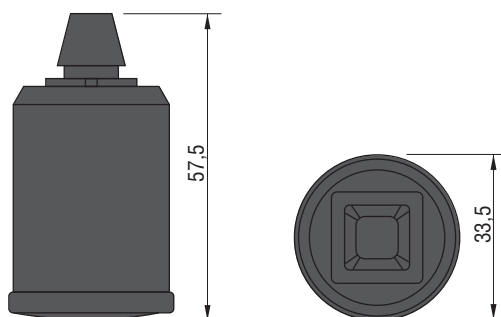

Mounting materials:

- 1 x Sst Bolt M4 x 25
- 1 x Sst Nut M4
- 2 x Sst Washer M4
- and Mounting strip, 12 x 0,75mm, lenght 250mm

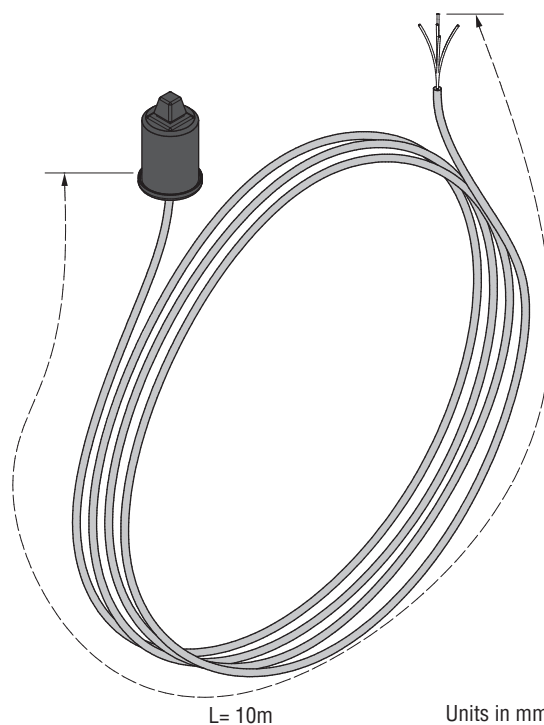

Units in mm

TECHNICAL DATA

Compact Joystick

Article number	0702000
Weight	306 g.
Protection	IP40 according to IEC 60529.
Operating temperature	-30°C to +70°C.
Construction	Delrin housing.
Cable	Process control cable Type C 5 x 0,14mm², Art. No. 1210230.
Power input	12 or 24V/DC.
Included	Mounting material.

Description

0702000  
306 g.  
IP40 according to IEC 60529.  
-30°C to +70°C.  
Delrin housing.  
Process control cable Type C 5 x 0,14mm², Art. No. 1210230.  
12 or 24V/DC.  
Mounting material.


Electrical connection

Functions

1 = Grey	Power input
2 = White	Switch signal
3 = Green	Switch signal
4 = Brown	Switch signal
5 = Yellow	Switch signal

Connecting Joystick to a Orlaco Serial Monitor

Joystick	Orlaco Serial Monitor
1 = Grey	Red 12 - 36V/DC
2 = White	Yellow (zoom)
4 = Brown	Grey (zoom)



All data subject to change without notice. All dimensions are for commercial purpose only.  
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.  
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

