


Product Data



Dimensions

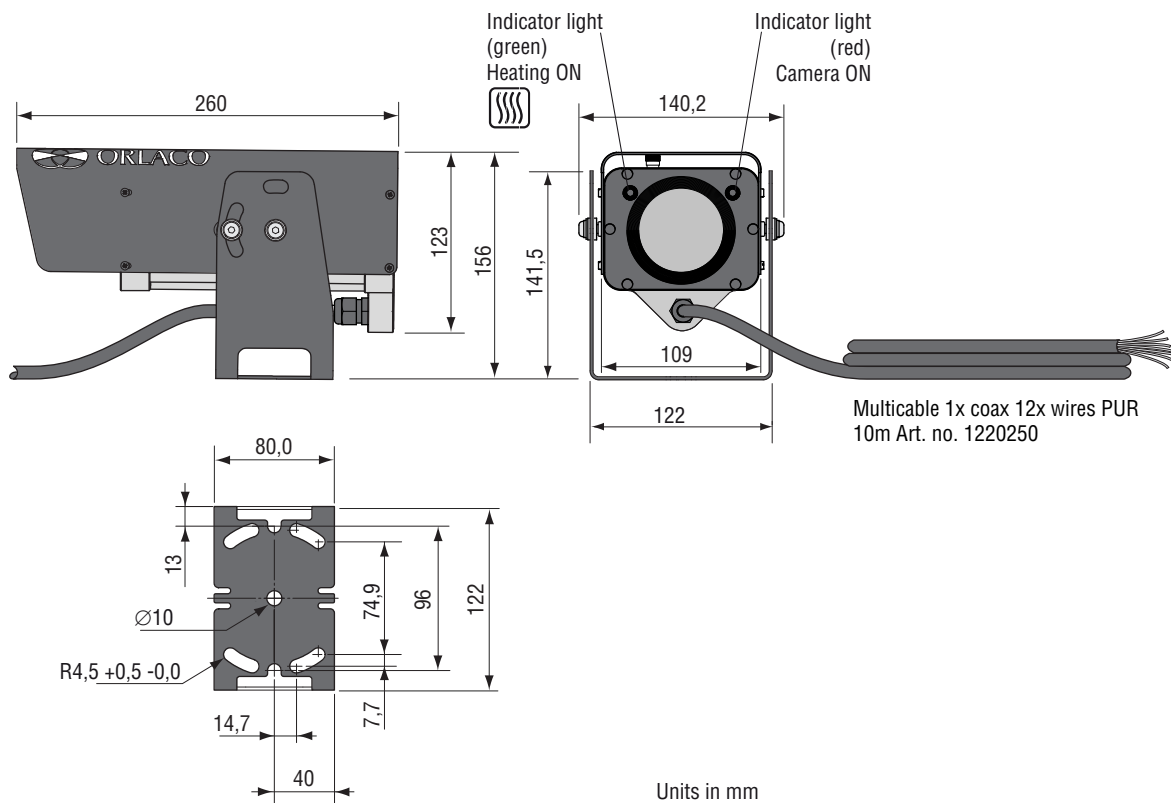


TECHNICAL DATA

Camera AFZ PAL HW

	Description
Article number	0103513
	Sensor
Image sensor	2.4 MPixel 1/3" CMOS sensor.
Total pixels	1956 (H) x 1266 (V).
Hor. Resolution	>700 TV lines (PAL/NTSC).
Lens	30x optical, 32x digital zoom. f = 5.1 mm to 51 mm, F1.6 (WIDE) to F1.8 (TELE). High zoom ratio up to 53x when used in PAL/NTSC mode (1.9x digital zoom will not influence image quality. Sensor itself is ± 4x the number of pixels needed to create PAL/NTSC output).
Angle of view (H)	58.9° (wide) 2,11° (tele).
Minimum illumination	0.5 lux (1/30sec).
0-Lux mode	0.025 lux (1/7.5sec).
	Electrical
Power input	Cable between camera and power supply < 50 m 12-24V/DC, > 50 m 18-24V/DC.
Power consumption	Temperature <0°C (Heating on): 7,2 W & >0°C (Heating off): 3,6 W.
Communication	Hard wired input.
Cable	Hard wired, 5,1m Multicable 1x coax 12x wired; Art. no. 1220250.
	Mechanical
Construction	Stainless steel QS304, mounting parts and sun cover, anodised aluminium housing, suitable for mobile applications with shocks and vibrations. Corrosion proof housing according to IEC 60068-2-52 salt mist, cyclic. Dry-nitrogen filled, 1.4 Bar overpressure.
Ingress protection	IP68 according to IEC 60529, Dust tight and protected against the effects of immersion in water up to 10m under water for 30 minutes and IP69K according to DIN 40050-9, camera can withstand a high pressure cleaning with water: 14-16L/min 80°C and 100 Bars flow.
Bracket	Standard Alu bracket, including bolts, nuts and washers. Suitable for mounting overhead and standing.
Operating temperature	-40°C to +85°C.
Glass	Chemically hardened lens glass, 7x stronger than ordinary glass, scratchproof surface, following "VII Flachgläser"(German std.).
Weight	2,6 kg.
	Certification
Green Passport	All materials are compliant to Green Passport requirements according IMO resolution MEPC.197(62) as adopted on 15 July 2011 (Maritime sector: International Maritime Organization concerning the functions of the Marine Environment Protection Committee).
Installation	See Installation Manual; IM0973112 .

Electrical connections
Multicable 1x coax 12x wired; Art. no. 1220250

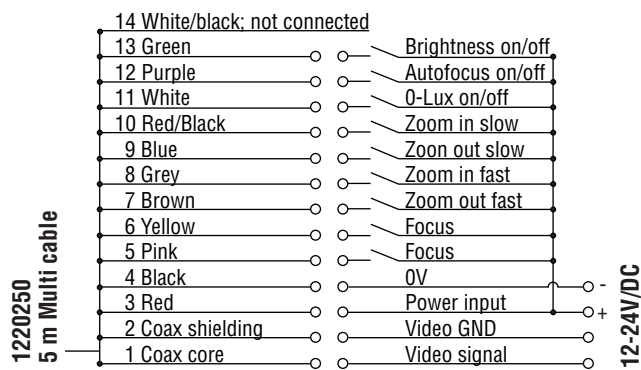

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

