


Rack-mounted multi-display industrial monitors



Multi-display range with high quality grade components.
Our rugged monitors are designed for a long life and are shock/vibration proof.

Description

- 19 inch rack mount
- High resolution
- Dual or triple LCD panel
- Heavy duty steel chassis with hardness glass protect screen
- Front OSD control buttons to optimize the display

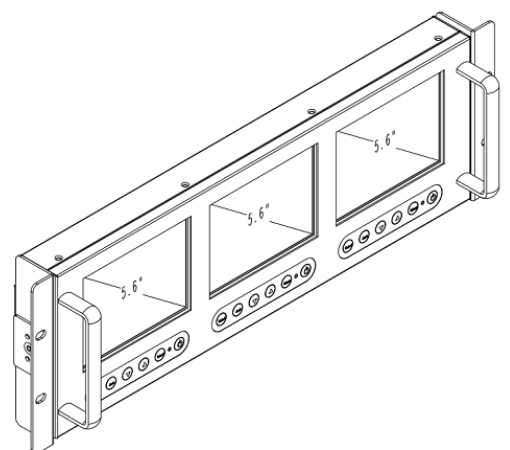


Technical specification :


Screen size	6,5" x 2	7" x 2	8" x 2	5,6" x 3
Reference	RACK2X6	RACK2X7	RACK2X8	RACK3X56
Backlight Type	LED			
Resolution	640*480	1280*800	1024*768	640*480
Contrast ratio	600 :1	800 :1	700 :1	500 :1
Brightness	700	400	300	200
View Angles	160/140	160/160	150/150	140/120
Pixel (mm)	0.207x0.207	0.117x0.117	0.05275x0.15825	0.0588x0.1764
Max. Color	16.2M	16.7M	RGB Strip	262K
MTBF	50,000	X	50,000	50,000
DVI-D	DVI-D 24Pin Connector (Female)	X	X	X
VGA	D-SUB 15Pin Connector (Female)			
Composite Video	X	RCA plug		
HDMI	OPTION			X
Audio	3.5" Jack			
Power Input	External power adapter			
Touch USB (option)	USB A type connector			
Touch RS232 (option)	D-SUB 9P connector (Female)			
AC Power Input	100-240VAC / DC 12V external AC adapter 9-36VDC in option			
Height	3,5U	3U	4U	3.5U
Ingress protection	N/A			
Mounting	Rack Mount			
Construction	Metal housing			
Operating Temperature	0 – 50°C			
Operating Humidity	5% - 95% (non-condensing)			
Anti-Vibration	5 - 500 Hz / 1 Grms PTP			
Anti-shock	15G / Peak (11 ms)			
Dimension (LxHxP)	483 x 154 x 63 (mm)	482 x 132 x 63 (mm)	483 x 186 x 64 (mm)	482 x 152 x 63 (mm)
Net Weight / Gross Weight	5.5 / 6.5 (KGs)	3.5 / 5 (KGs)	7 / 8.5 (KGs)	(KGs)
Certification and Approvals	CE / FCC / RoHs			




6" RACK2X6

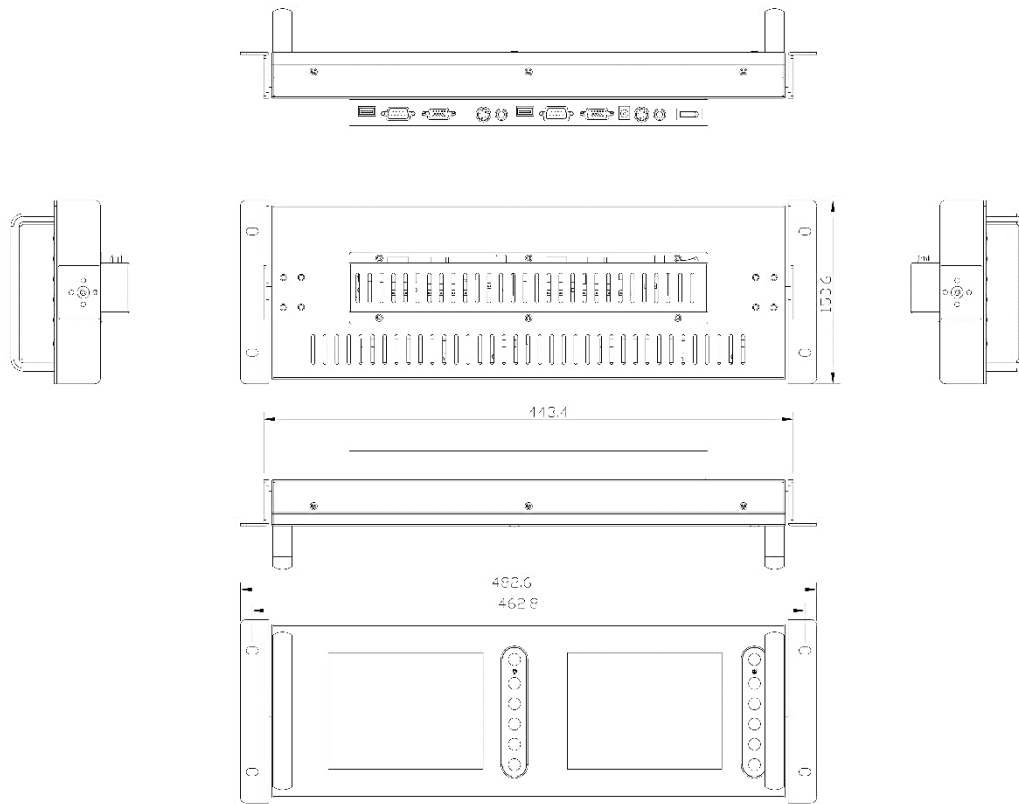

7" RACK2X7

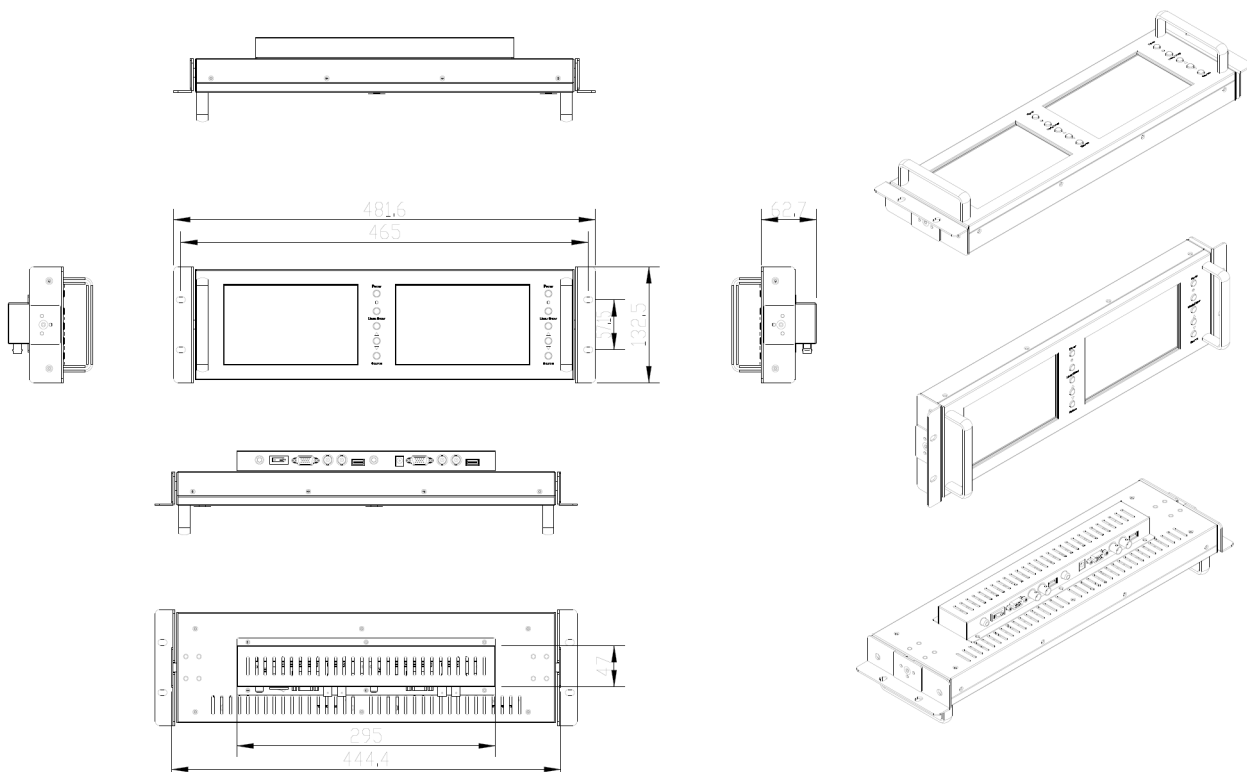

8" RACK2x8

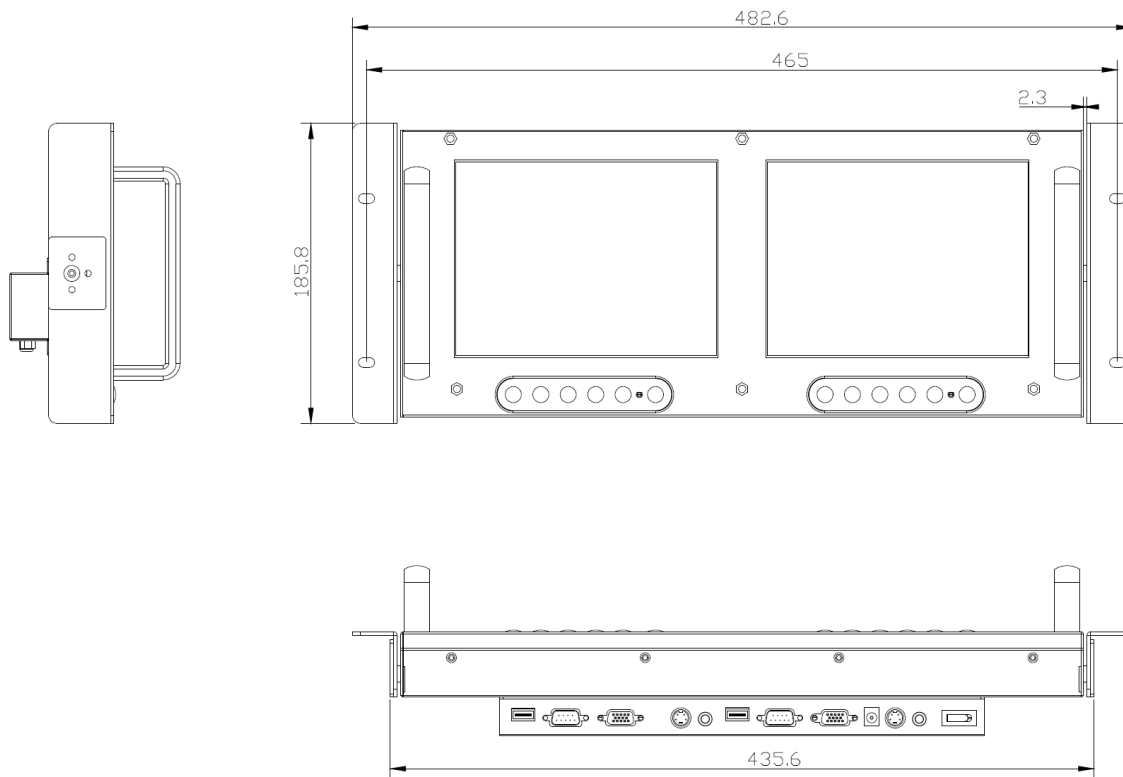

5.6" RACK3X56

