



# Product Data

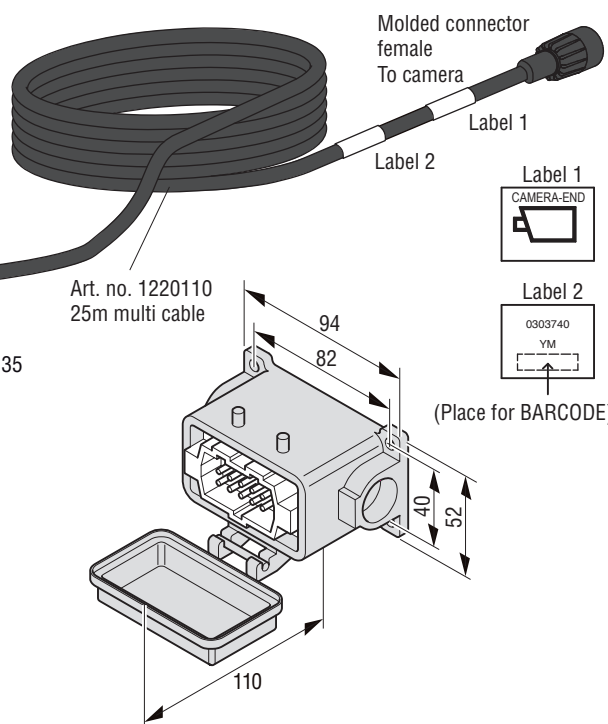

## Dimensions

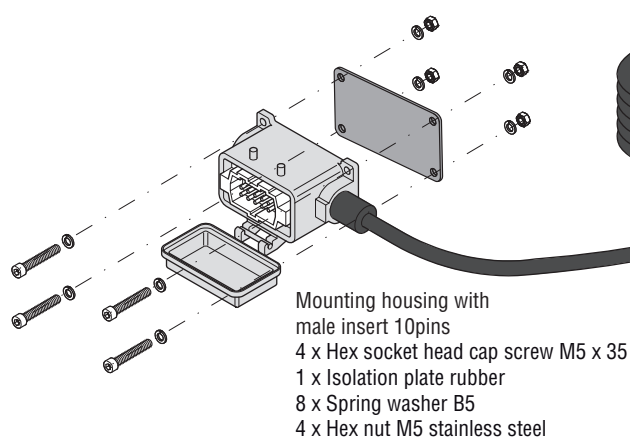


TECHNICAL DATA

Cable Trailer 25 m4F h10M mount

Article number	<b>Description</b> <b>0303740</b>
Length	25m.
Cable	Art. No. 1220110, Multi cable 1 x coax + 2 x power, 1 x data.
Connectors	10 pins male connector with protection cap, grey, and 4pins female molded connector.
Mounting hardware	Rubber isolation, 4 x head cap screws M5 x 35, 8 x spring washers B5, 4 x hex nuts M5.
Operating temperature	-40°C ... +85°C
Weight	1,98kg.
Protection	IP 67 according to IEC 60529 & vibration proof.
Kit assembly	To complete the Kit use articles <b>0304020</b> and <b>0303630</b> .



Installation

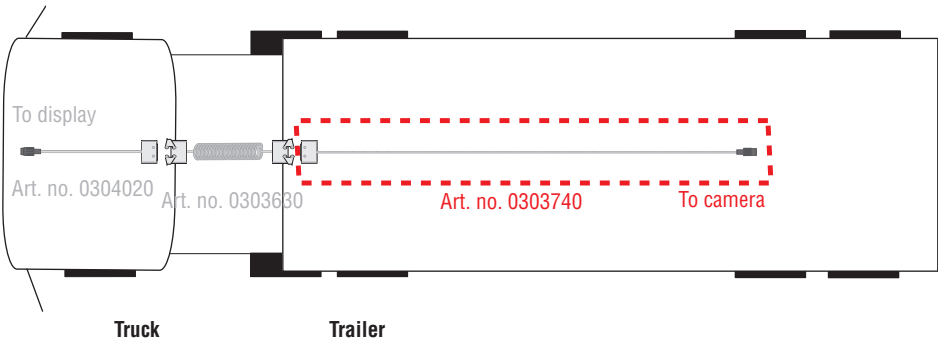

Electrical connection

Connectors

- 1 = Coax core = video signal
- 2 = Coax screen = video GND
- 3 = Red = 12V/DC
- 4 = Black = 0V
- 5 - 9 = = N.C.
- 10 = = Shield



pin layout  
10p male connector

All data subject to change without notice. All dimensions are for commercial purpose only.  
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.  
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

